


LED Compact Rectangular Work Light - Model 893

PRODUCT INFORMATION

Description	12/24V LED Work Light with Pedestal Mount
Height	70.00 mm / 2.76 in
Width	196.00 mm / 7.72 in
Depth	45.00 mm / 1.77 in
Shape	Rectangular
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Aluminum
Housing Color	Black
Mounting Hardware Description	(x1) 5/16"-18 x 1.00" Mounting Bolt Bracket
Mounting Type	Pedestal
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	85 °C / 185 °F
Mating Connector	Deutsch DT06-2S-E003
Product Weight	1.02 lbs / 0.46 kgs
Shipping Weight	1.30 lbs / 0.59 kgs



PRODUCT DIMENSIONS

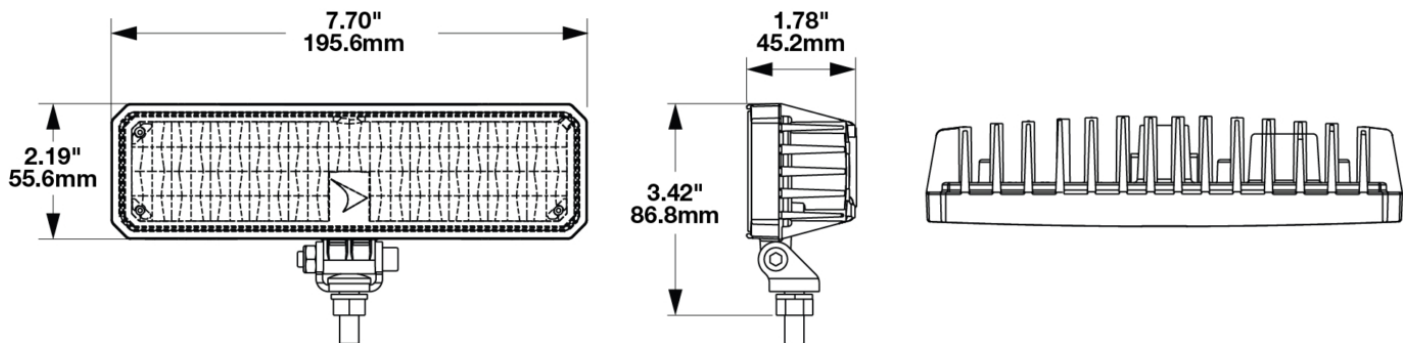

Print date: 2024-11-08

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Compact Rectangular Work Light – Model 893

ELECTRICAL SPECIFICATIONS

Input Voltage	9-32V DC
Operating Voltage	12-24V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
Red Wire	Power
Black Wire	Ground
Current Draw	4.5A @ 12V DC (Power) 1.8A @ 24V DC (Power)


REGULATORY STANDARDS COMPLIANCE



Buy America Standards	ECE Reg 10
Eco Friendly	IEC IP67
IEC IP69K	Tested to ECE Reg. 10 (Radiated Emissions only)

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	7120
Effective Lumen Output	3700
Candela Output	6230
Nominal LED Color Temperature	5050 K

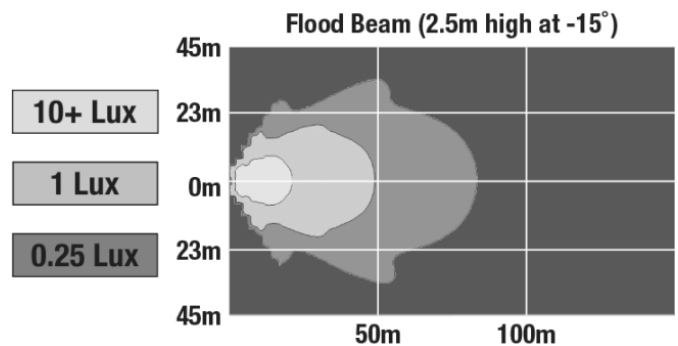

Print date: 2024-11-08

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Compact Rectangular Work Light - Model 893

APPLICATIONS



PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

Print date: 2024-11-08

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660