


LED Compact Rectangular Work Light - Model 894

PRODUCT INFORMATION

Description	12-24V LED Work Light with Pedestal Mount
Height	83.00 mm / 3.27 in
Width	422.00 mm / 16.61 in
Depth	72.00 mm / 2.83 in
Shape	Rectangular
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Aluminum
Housing Color	Black
Mounting Hardware Description	(x1) 5/16-18 x 1.00" Mounting Bolt Bracket
Mounting Type	Pedestal
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	85 °C / 185 °F
Connector or Wiring	Deutsch DT06-2S-E003
Product Weight	1.02 lbs / 0.46 kgs
Shipping Weight	1.35 lbs / 0.61 kgs



PRODUCT DIMENSIONS

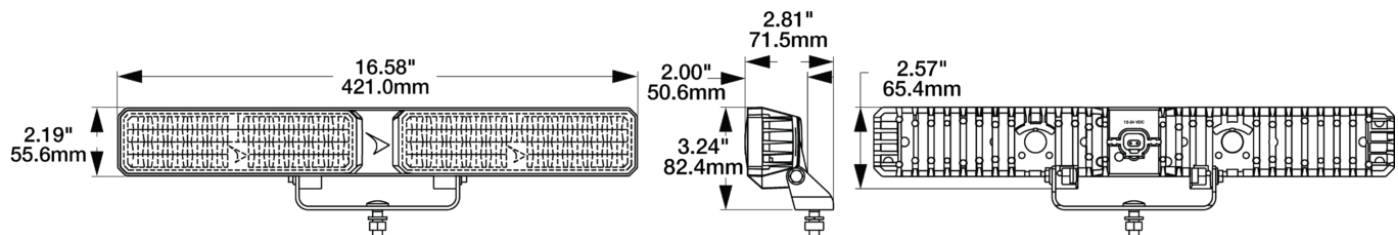

Print date: 2026-07-07

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Compact Rectangular Work Light – Model 894

ELECTRICAL SPECIFICATIONS

Input Voltage	9-30V DC
Operating Voltage	12-24V DC
Red Wire	Power
Black Wire	Ground
Current Draw	9.0A @ 12V DC (Power) 4.0A @ 24V DC (Power)

REGULATORY STANDARDS COMPLIANCE




Buy America Standards
Eco Friendly
IEC IP69K

CE Recognized
IEC IP67

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	14000
Effective Lumen Output	7750
Candela Output	17450
Nominal LED Color Temperature	5055 K

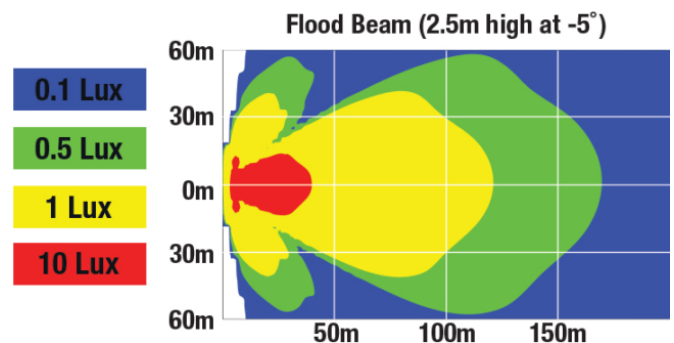

Print date: 2026-07-07

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
Engineered. Lighting. Solutions.

LED Compact Rectangular Work Light - Model 894

APPLICATIONS



PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

Print date: 2026-07-07

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660