


LED Dome Lights - Model 410

PRODUCT INFORMATION

Description	12-24V LED Dome Light
Height	75.44 mm / 2.97 in
Width	165.35 mm / 6.51 in
Depth	24.64 mm / 0.97 in
Shape	Rectangular
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Polycarbonate
Housing Color	Black
Mounting Hardware Description	(x2) #8-32 x Phillips Taptite Mounting Screws
Mounting Type	Flush Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	MOLEX P/N 190250004
Mating Connector	MOLEX P/N 190170014
Product Weight	0.00 lbs / 0 kgs
Shipping Weight	0.90 lbs / 0.41 kgs



PRODUCT DIMENSIONS

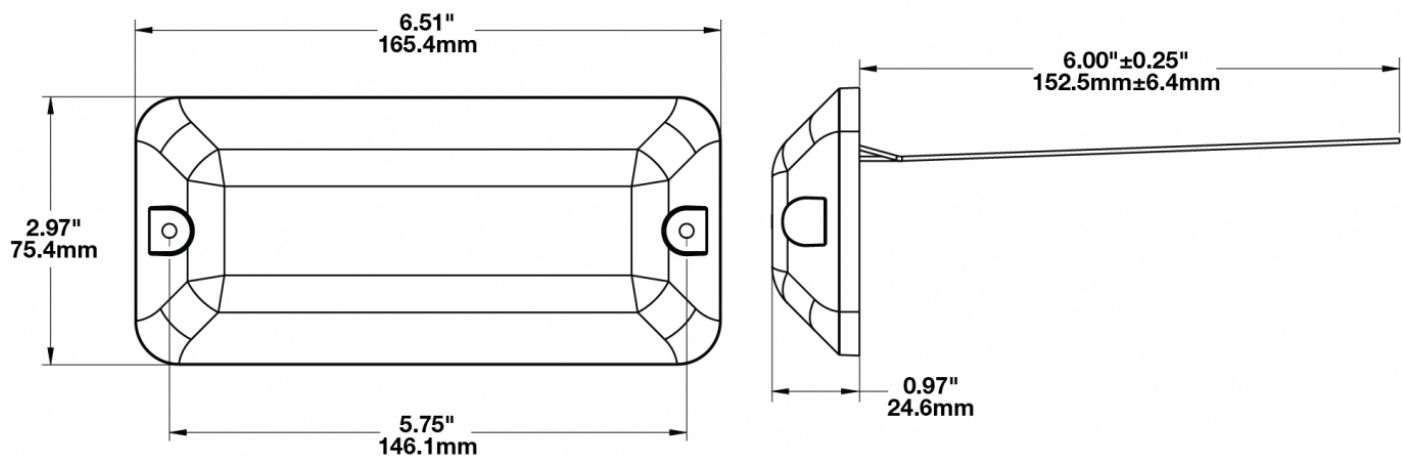

Print date: 2024-11-09

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Dome Lights - Model 410

ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Operating Voltage	9-32V DC
Transient Spike Protection	150V Peak @ 1 HZ-100 Pulses
Red Wire	Positive
Black Wire	Negative
Current Draw	0.14A @ 12V DC 0.09A @ 24V DC

REGULATORY STANDARDS COMPLIANCE



Buy America Standards	ECE Reg 10
Eco Friendly	Tested to ECE Reg. 10 (Radiated Emissions only)

PHOTOMETRIC SPECIFICATIONS


Nominal LED Color Temperature	5000 K
Beam Pattern(s)	Interior - Dome Light

Print date: 2024-11-09

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Dome Lights - Model 410

APPLICATIONS

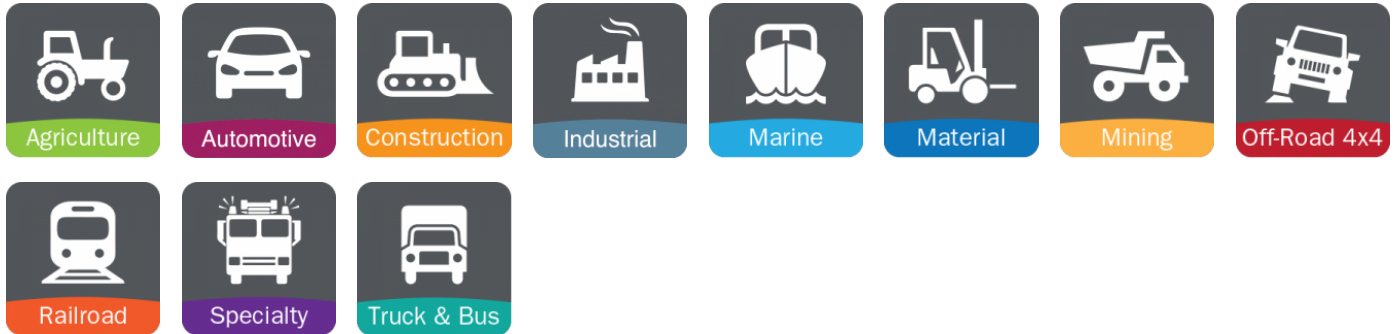

PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

Print date: 2024-11-09

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660