LED Dome lights & Signal Lights - Model 412

PRODUCT INFORMATION

Description 12-48V Clear LED Dome Light with 7"

Bare Leads, No Switch, No Timer

 Height
 57.15 mm / 2.25 in

 Width
 165.10 mm / 6.5 in

 Depth
 27.69 mm / 1.09 in

ShapeRectangularOuter Lens MaterialPolycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black

Mounting Hardware (x2) M4-0.7 x 16 Mounting Bolts

65 °C / 149 °F

Description

Mounting Type Low Profile Mount
Minimum Operating -40 °C / -40 °F
Temperature


Maximum Operating


Temperature

Connector or Wiring7" Bare LeadsProduct Weight0.33 lbs / 0.15 kgsShipping Weight5.06 lbs / 2.3 kgs



PRODUCT DIMENSIONS

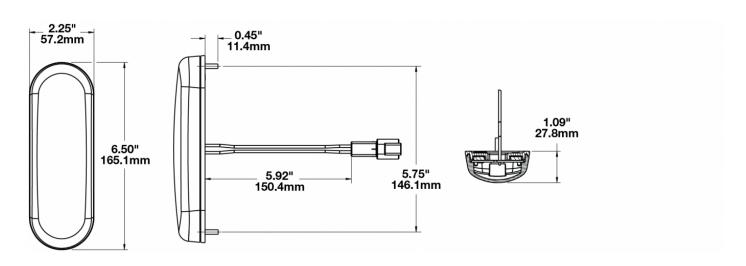





LED Dome lights & Signal Lights - Model 412

ELECTRICAL SPECIFICATIONS

Input Voltage12-48V DCRed WirePositiveBlack WireNegative

Current Draw 0.10A to 0.13A @ 12V DC

0.055A to 0.08A @ 24V DC 0.045A to 0.07A @ 36V DC 0.045A to 0.07A @ 48V DC

REGULATORY STANDARDS COMPLIANCE









Buy America Standards Eco Friendly IEC IP67 SAE J1113-13

UL Recognized

PHOTOMETRIC SPECIFICATIONS

Nominal LED Color 5000 K

Temperature

Beam Pattern(s) Interior - Dome Light



LED Dome lights & Signal Lights - Model 412

APPLICATIONS























PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

RELATED PRODUCTS



Part Number 0343121 12-48V ECE LED Front Position & Front Turn Signal Light



0443011 12-48V Clear LED Dome Light with 7" Bare Leads & Switch, No Timer

Part Number



Part Number 0443301 12-48V Clear LED Dome Light with Deutsch Connector, Switch & 60 Minute Timer