LED Dome lights & Signal Lights - Model 412

PRODUCT INFORMATION

Description 12-48V Clear LED Dome Light with 7"

Bare Leads & Switch, No Timer

 Height
 57.15 mm / 2.25 in

 Width
 165.10 mm / 6.5 in

 Depth
 27.69 mm / 1.09 in

Shape Rectangular
Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black

Mounting Hardware (x2) M4-0.7 x 16 Mounting Bolts

Description

Mounting TypeLow Profile Mount
Minimum Operating
-40 °C / -40 °F

Temperature


Maximum Operating $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$

Temperature

Connector or Wiring7" Bare LeadsProduct Weight0.33 lbs / 0.15 kgsShipping Weight5.40 lbs / 2.45 kgs



PRODUCT DIMENSIONS

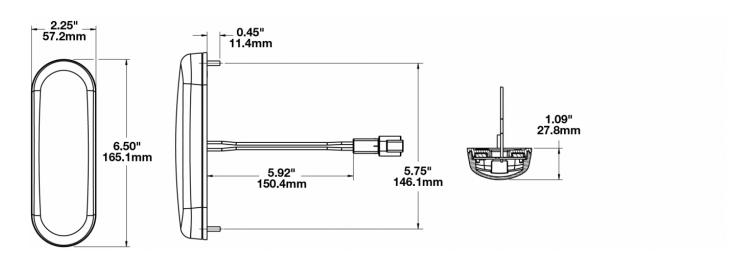

Print date: 2025-07-27



LED Dome lights & Signal Lights - Model 412

ELECTRICAL SPECIFICATIONS

Input Voltage12-48V DCRed WirePositiveBlack WireNegative

Current Draw 0.10A to 0.13A @ 12V DC

0.055A to 0.08A @ 24V DC 0.045A to 0.07A @ 36V DC 0.045A to 0.07A @ 48V DC

REGULATORY STANDARDS COMPLIANCE







Buy America Standards Eco Friendly IEC IP67 UL Recognized

PHOTOMETRIC SPECIFICATIONS

Nominal LED Color 5000 K

Temperature

Beam Pattern(s) Interior - Dome Light

APPLICATIONS




























LED Dome lights & Signal Lights - Model 412

PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

RELATED PRODUCTS





12-48V ECE LED Front Position & Front Turn Signal Light



Part Number 0442511

12-48V Clear LED Dome Light with 7" Bare Leads, No Switch, No Timer



<u>Part Number</u> 0443301

12-48V Clear LED Dome Light with Deutsch Connector, Switch & 60 Minute Timer

