LED Dome lights & Signal Lights - Model 412

PRODUCT INFORMATION

Description	12-48V Clear LED Dome Light with 7" Bare Leads & Switch, No Timer
Height	57.15 mm / 2.25 in
Width	165.10 mm / 6.5 in
Depth	27.69 mm / 1.09 in
Shape	Rectangular
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Polycarbonate
Housing Color	Black
Mounting Hardware Description	(x2) M4-0.7 x 16 Mounting Bolts
Mounting Type	Low Profile Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	7" Bare Leads
Product Weight	0.33 lbs / 0.15 kgs
Shipping Weight	5.40 lbs / 2.45 kgs

PRODUCT DIMENSIONS
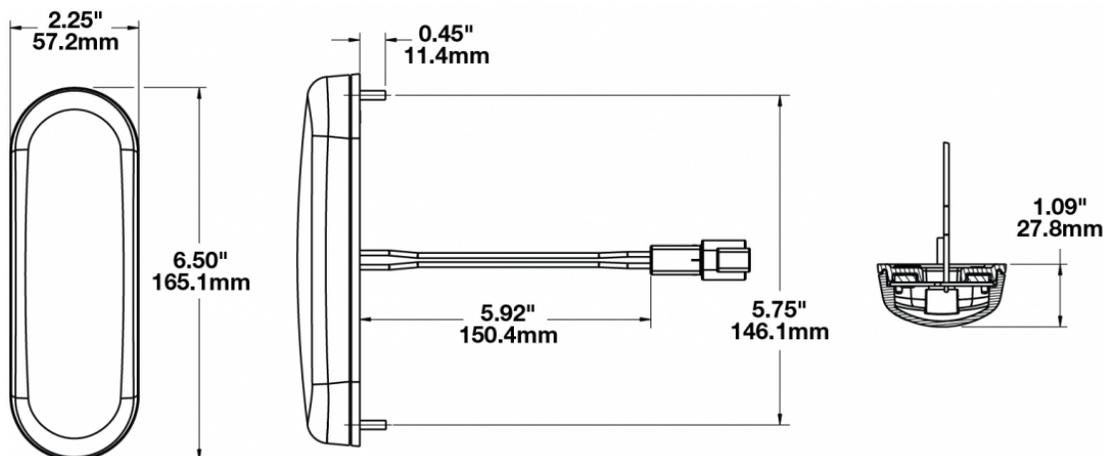
LED Dome lights & Signal Lights - Model 412

ELECTRICAL SPECIFICATIONS

Input Voltage	12-48V DC
Red Wire	Positive
Black Wire	Negative
Current Draw	0.10A to 0.13A @ 12V DC
	0.055A to 0.08A @ 24V DC
	0.045A to 0.07A @ 36V DC
	0.045A to 0.07A @ 48V DC

REGULATORY STANDARDS COMPLIANCE

Buy America Standards	Eco Friendly
IEC IP67	UL Recognized

PHOTOMETRIC SPECIFICATIONS

Nominal LED Color Temperature	5000 K
Beam Pattern(s)	Interior - Dome Light

APPLICATIONS
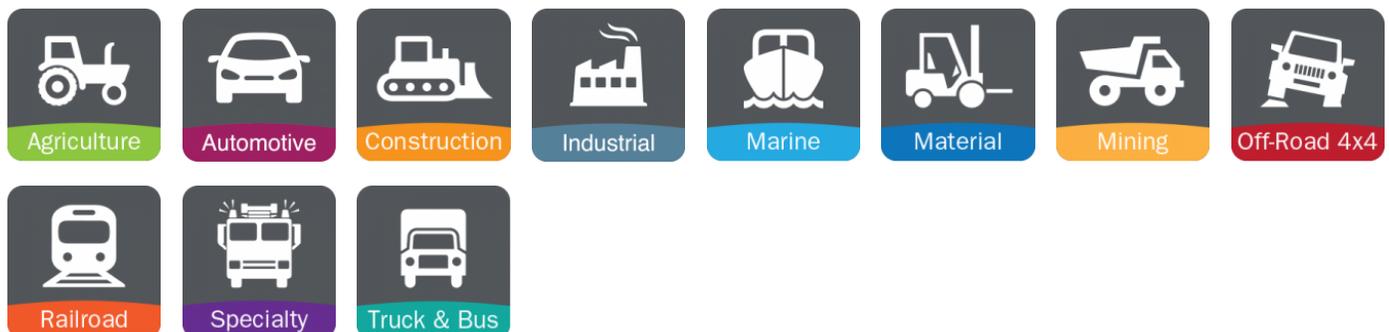
Agriculture · Automotive · Construction · Industrial · Marine · Material · Mining · Off-Road 4x4

Railroad · Specialty · Truck & Bus

LED Dome lights & Signal Lights - Model 412

PRODUCT WARNINGS

For California residents:
⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.
⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

RELATED PRODUCTS

Part Number 0343121
12-48V ECE LED Front Position & Front Turn Signal Light

Part Number 0442511
12-48V Clear LED Dome Light with 7" Bare Leads, No Switch, No Timer

Part Number 0443301
12-48V Clear LED Dome Light with Deutsch Connector, Switch & 60 Minute Timer