LED Dome lights & Signal Lights - Model 412

PRODUCT INFORMATION

Description 12-48V Clear LED Dome Light with

Deutsch Connector, Switch & 60 Minute

Timer

 Height
 57.15 mm / 2.25 in

 Width
 165.10 mm / 6.5 in

 Depth
 27.69 mm / 1.09 in

Shape Rectangular

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black

Mounting Hardware (x2) M4-0.7 x 16 Mounting Bolts

Description

Mounting TypeLow Profile Mount **Minimum Operating**-40 °C / -40 °F

Temperature

Maximum Operating 65 °C / 149 °F

Temperature

Connector or Wiring 2-Pin Deutsch Socket (DT04-2P)


Product Weight 0.33 lbs / 0.15 kgs **Shipping Weight** 5.66 lbs / 2.57 kgs





LED Dome lights & Signal Lights - Model 412

PRODUCT DIMENSIONS

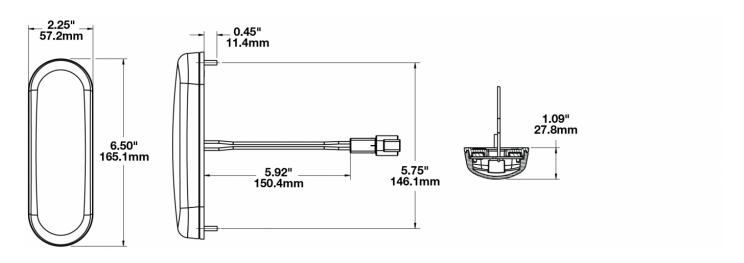

ELECTRICAL SPECIFICATIONS

Input Voltage12-48V DCRed WirePositiveBlack WireNegative

Current Draw 0.10A to 0.13A @ 12V DC

0.055A to 0.08A @ 24V DC 0.045A to 0.07A @ 36V DC 0.045A to 0.07A @ 48V DC

REGULATORY STANDARDS COMPLIANCE



Buy America Standards Eco Friendly IEC IP67 UL Recognized



LED Dome lights & Signal Lights - Model 412

PHOTOMETRIC SPECIFICATIONS

Nominal LED Color

5000 K

Temperature

Interior - Dome Light

APPLICATIONS

Beam Pattern(s)























PRODUCT WARNINGS

For California residents:

WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

RELATED PRODUCTS







Part Number 0343121 12-48V ECE LED Front

Position & Front Turn
Signal Light

<u>Part Number</u> <u>0442511</u>

12-48V Clear LED Dome Light with 7" Bare Leads, No Switch, No Timer

Part Number 0443011

12-48V Clear LED Dome Light with 7" Bare Leads & Switch, No Timer

Print date: 2025-07-27

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A. www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

