


# LED Auxiliary Driving Light - Model 8710

## PRODUCT INFORMATION

|                                      |  |
|--------------------------------------|--|
| <b>Description</b>                   | 12-24V ECE LED RHT & LHT High Beam with Chrome Inner Bezel |
| <b>Height</b>                        | 177.80 mm / 7 in   |
| <b>Width</b>                         | 177.80 mm / 7 in   |
| <b>Shape</b>                         | Round  |
| <b>Outer Lens Material</b>           | Polycarbonate  |
| <b>Outer Lens Color</b>              | Clear  |
| <b>Housing Material</b>              | Aluminum   |
| <b>Housing Color</b>                 | Black  |
| <b>Bezel Color</b>                   | Chrome   |
| <b>Retrofits</b>                     | PAR 56 High Beam   |
| <b>Minimum Operating Temperature</b> | -40 °C / -40 °F  |
| <b>Maximum Operating Temperature</b> | 66 °C / 150.8 °F   |
| <b>Connector or Wiring</b>           | H4   |
| <b>Mating Connector</b>              | AMP# 172615-2  |
| <b>Product Weight</b>                | 2.20 lbs / 1 kgs   |
| <b>Shipping Weight</b>               | 3.10 lbs / 1.41 kgs  |



## PRODUCT DIMENSIONS

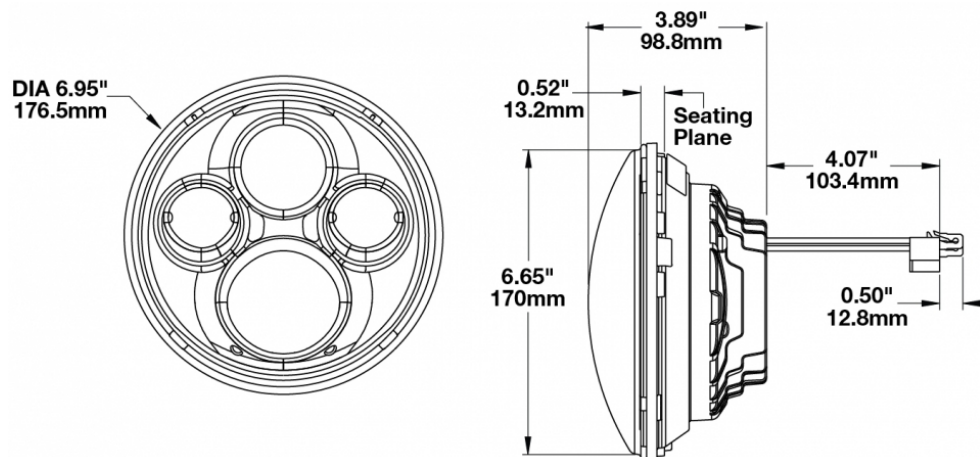

Print date: 2018-04-20

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**  
 Engineered. Lighting. Solutions.

# LED Auxiliary Driving Light - Model 8710

## ELECTRICAL SPECIFICATIONS

|                          |                                  |
|--------------------------|----------------------------------|
| <b>Input Voltage</b>     | 12-24V DC                        |
| <b>Operating Voltage</b> | 9-32V DC                         |
| <b>Black Wire</b>        | Ground                           |
| <b>white Wire</b>        | Positive                         |
| <b>Current Draw</b>      | 4.80A @ 12V DC<br>2.50A @ 24V DC |

## REGULATORY STANDARDS COMPLIANCE




Buy America Standards  
Eco Friendly

ECE Reg 112  
IEC IP67

## PHOTOMETRIC SPECIFICATIONS

|                                      |                                    |
|--------------------------------------|------------------------------------|
| <b>Raw Lumen Output</b>              | 3,300                              |
| <b>Effective Lumen Output</b>        | 1,440                              |
| <b>Candela Output</b>                | 133,000                            |
| <b>Nominal LED Color Temperature</b> | 5000 K                             |
| <b>Beam Pattern(s)</b>               | Forward Lighting - High Beam (ECE) |

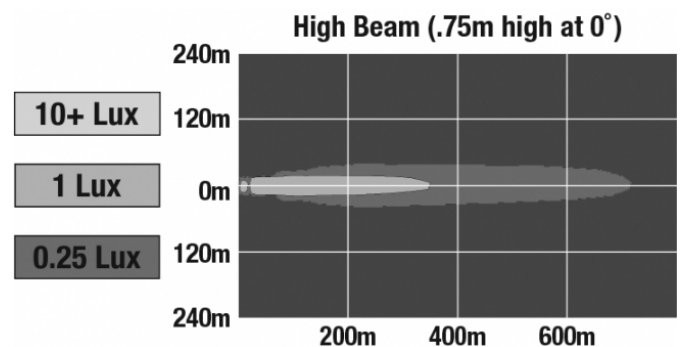

Print date: 2018-04-20

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# LED Auxiliary Driving Light - Model 8710

## APPLICATIONS

---



## ACCESSORIES

---



**Part Number**  
**3156351**  
Mounting Ring Kit for  
7" Round (PAR56)  
Headlights



**Part Number**  
**3156561**  
Panel Mount Bucket  
Assembly for 8700  
Evolution & 8710  
Series



**Part Number**  
**3266081**  
Jumper Harness  
H4/H13 for 8700  
Evolution & 8710  
Series

## RELATED PRODUCTS

---



**Part Number**  
**0550021**  
12-24V ECE LED RHT &  
LHT High Beam with  
Black Inner Bezel

---

**Print date: 2018-04-20**

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660