

# LED Emergency & Warning Light - Model 8750

## PRODUCT INFORMATION

<b>Description</b>	24V LED Amber Arrow Warning Light - Model 8750
<b>Height</b>	177.20 mm / 6.98 in
<b>Width</b>	177.20 mm / 6.98 in
<b>Depth</b>	108.60 mm / 4.28 in
<b>Shape</b>	Round
<b>Outer Lens Material</b>	Polycarbonate
<b>Outer Lens Color</b>	Amber
<b>Housing Material</b>	Glass Fill Polycarbonate
<b>Housing Color</b>	Black
<b>Mounting Hardware Description</b>	(x3) M6-1 x 26.5
<b>Mounting Type</b>	Panel
<b>Minimum Operating Temperature</b>	-45 °C / -49 °F
<b>Maximum Operating Temperature</b>	85 °C / 185 °F
<b>Connector or Wiring</b>	118mm Instrument Cable with Flying Leads
<b>Shipping Weight</b>	1.50 lbs / 0.68 kgs
<b>Additional Information</b>	CE Ready IP67, IP69k




Print date: 2018-02-19

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER®**  
Engineered. Lighting. Solutions.

# LED Emergency & Warning Light - Model 8750

## PRODUCT DIMENSIONS

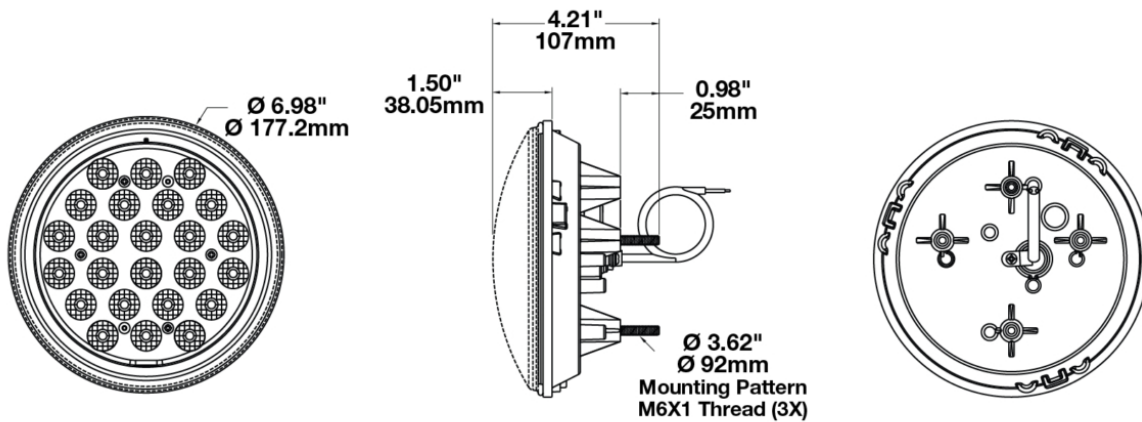

## ELECTRICAL SPECIFICATIONS

<b>Input Voltage</b>	24 V
<b>Red Wire</b>	Power
<b>Black Wire</b>	Ground
<b>Current Draw</b>	0.80A @ 24V

## REGULATORY STANDARDS COMPLIANCE



Buy America Standards

Eco Friendly

Print date: 2018-02-19

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.  
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# LED Emergency & Warning Light - Model 8750

## PHOTOMETRIC SPECIFICATIONS

---

<b>Raw Lumen Output</b>	900
<b>Effective Lumen Output</b>	450
<b>Candela Output</b>	3000
<b>Beam Pattern(s)</b>	Warning - Flashing Warning

## APPLICATIONS

---

