


LED Light Bars - Model 9049-3M

PRODUCT INFORMATION

Description	12V LED 19" Light Bar with Spot Beam Pattern & Driving Light
Height	102.97 mm / 4.05 in
Width	562.66 mm / 22.15 in
Depth	69.85 mm / 2.75 in
Shape	Rectangular
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Aluminum
Housing Color	Black
Mounting Type	Universal Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	36" Bare Leads



PRODUCT DIMENSIONS

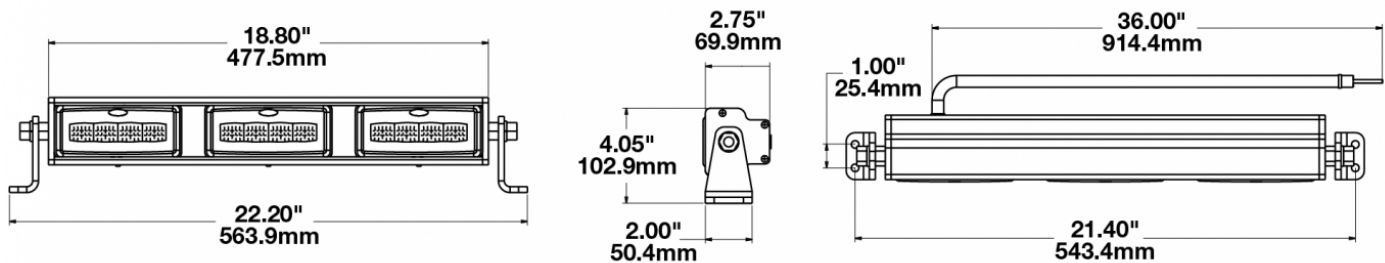

Print date: 2017-06-29

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Light Bars - Model 9049-3M

ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Red Wire	Positive
Black Wire	Negative
Current Draw	4.08A @ 12.8V DC 2.10A @ 24V DC

REGULATORY STANDARDS COMPLIANCE




Buy America Standards
SAE J1113-21

Eco Friendly

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	3,840
Effective Lumen Output	1,460
Candela Output	18,500
Nominal LED Color Temperature	5000 K
Beam Pattern(s)	Forward Lighting - Driving Forward Lighting - Spot

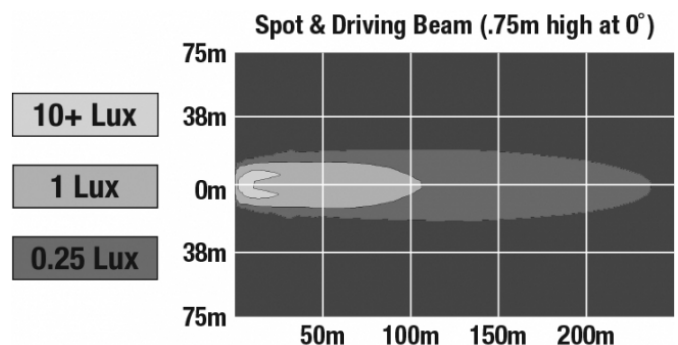

Print date: 2017-06-29

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Light Bars - Model 9049-3M

APPLICATIONS



RELATED PRODUCTS



Part Number

0549281

12V SAE/ECE LED 19"
Light Bar with Fog
Beam Pattern