LED Headlights - Model 6130 Evolution

PRODUCT INFORMATION

Description 12-24V ECE LED LHT Low Beam

Headlight

120.40 mm / 4.74 in Height Width 120.40 mm / 4.74 in **Depth** 81.53 mm / 3.21 in

Shape Round

Outer Lens Material Polycarbonate

Outer Lens Color Clear **Housing Material** Aluminum **Housing Color** Black **Bezel Color** Black


Connector or Wiring 12" Flying Leads

Mating Connector n/a

Product Weight 1.50 lbs / 0.68 kgs



PRODUCT DIMENSIONS

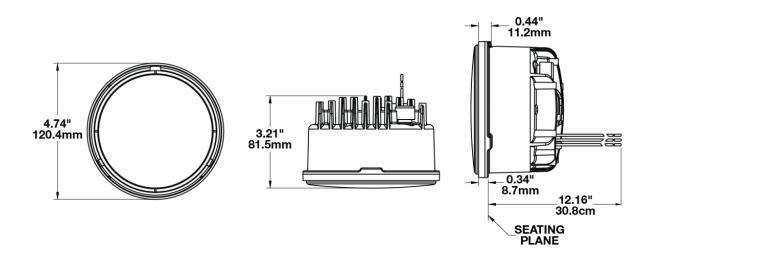



LED Headlights - Model 6130 Evolution

ELECTRICAL SPECIFICATIONS

Input Voltage 12-24V DC
Operating Voltage 10-30V DC
Black Wire Ground
Yellow Wire DRL

White Wire Low Beam

 Current Draw
 2.07A @ 12V DC (Low Beam)

 0.96A @ 24V DC (Low Beam)

 0.44A @ 12V DC (DRL)

 0.24A @ 24V DC (DRL)

REGULATORY STANDARDS COMPLIANCE







Buy America Standards ECE Reg 87 IEC IP67 ECE Reg 112 Eco Friendly

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 1,690 (Low Beam) **Effective Lumen** 640 (Low Beam)


Output


Beam Pattern(s) Forward Lighting - Daytime

Running Light

Forward Lighting - Low Beam (ECE

Left Hand)

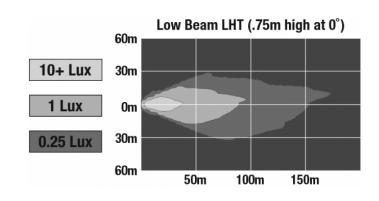



LED Headlights - Model 6130 Evolution

APPLICATIONS













ADDITIONAL INFORMATION

Jump Start: 48V for 2 min Reverse Polarity: -24V for 2 min

Load Dump: 150V 5 pulses 10 sec intervals Inductive Switching: 600V 10 pulses 1 sec intervals Mutual Coupling: 300V 10 pulses 1 sec intervals

RELATED PRODUCTS



Part Number 0549851 12-24V DOT/ECE LED RHT Low Beam Headlight



Part Number 0549871 12-24V DOT/ECE LED High Beam Headlight



Part Number 0549881 12-24V DOT/ECE LED RHT High & Low Beam Headlight



Part Number 0549891 12-24V ECE LED LHT High & Low Beam Headlight