PRODUCT INFORMATION

Description 12-24V ECE LED RHT High & Low Beam

Headlight with FP, DRL & Chrome Inner

Bezel

 Height
 176.53 mm / 6.95 in

 Width
 252.73 mm / 9.95 in

 Depth
 99.82 mm / 3.93 in

Shape Round

Outer Lens Material Polycarbonate

Outer Lens ColorClearHousing MaterialAluminumHousing ColorGrayBezel ColorChrome

Retrofits 2D1 "PAR56" or 7" round headlights

Minimum Operating -40 °C / -40 °F

Temperature

Maximum Operating 65 °C / 149 °F


Temperature

Connector or Wiring


Mating ConnectorH4 AMP#172615-2Product Weight2.31 lbs / 1.05 kgs







PRODUCT DIMENSIONS

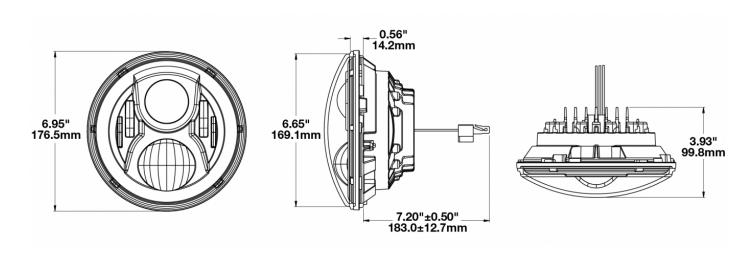

ELECTRICAL SPECIFICATIONS

Input Voltage 12-24V DC **Operating Voltage** 9-32V DC

Transient Spike Protection 150V Peak @ 1 HZ-100 Pulses

Black Wire Ground
White Wire High Beam
Yellow Wire Low Beam
Red Wire Front Position

Blue Wire DRI

 Current Draw
 3.00A @ 12V DC (High Beam)

 2.00A @ 12V DC (Low Beam)

 1.60A @ 24V DC (High Beam)

 1.10A @ 24V DC (Low Beam)

1.60A @ 12V DC (DRL) 0.80A @ 24V DC (DRL)

0.16A @ 12V DC (Front Position) 0.10A @ 24V DC (Front Position)



REGULATORY STANDARDS COMPLIANCE







Buy America Standards ECE Reg 7 Eco Friendly ECE Reg 112 ECE Reg 87 IEC IP67

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 2,610 (High Beam); 1,770 (Low

Beam)

Effective Lumen 1

Output

1,150 (High Beam); 750 (Low Beam)

Candela Output 60,897 (High Beam) 35,003 (Low

Beam) 5000 K

Nominal LED Color

Temperature

Beam Pattern(s)

Forward Lighting - Daytime

Running Light


Forward Lighting - High Beam

(DOT/ECE)

Forward Lighting - Low Beam (ECE

Right Hand)

Signalization - Front Position

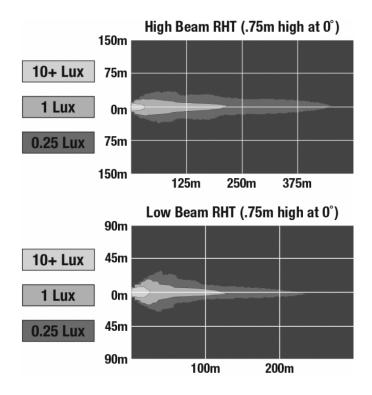

APPLICATIONS













ADDITIONAL INFORMATION

Headlight must be securely mounted and properly aimed such that the beam pattern cut off line complies with all applicable regulations. If you are not familiar with the legal requirements for aiming your headlights, please see a professional service provider. We recommend that headlights are aimed with a headlight aiming system for proper alignment.

Fits the following vehicles:

1955-1983 Jeep CJ-5*

1976-1986 Jeep CJ-7*

1981-1985 Jeep CJ-8*

1997-2006 Jeep Wrangler (TJ)

2007-2015 Jeep Wrangler 2-Door (JK)

2007-2015 Jeep Wrangler Unlimited 4-Door (JK)

ECE-COMPLIANCE

This light is ECE-compliant and is not for use on-road in the U.S.

To be ECE-compliant guarantees your lights are compliant in the European Union and in non-European countries that have adopted ECE Regulations for visibility, durability, and reliability.



^{*}Some modification of the bucket may be required

ACCESSORIES



Part Number 3156351 Mounting Ring Kit for 7" Round (PAR56) Headlights



Part Number 3156561 Panel Mount Bucket Assembly for 8700 Evolution & 8710 Series



Part Number 3266081 Jumper Harness H4/H13 for 8700 Evolution & 8710 Series



Part Number 8000311 Anti-Flicker Harness H4/H13 for 8700 Evolution Series Headlights



Part Number 8000381 Anti-Flicker Harness H4/H4 for 8700 Evolution Series Headlights

RELATED PRODUCTS



Part Number 0549701 12-24V DOT LED High & Low Beam Headlight with Black Inner Bezel



Part Number 0549711 12-24V DOT LED High & Low Beam Headlight with Chrome Inner Bezel



Part Number

0549721 12-24V ECE LED LHT High & Low Beam Headlight with FP, DRL & Black Inner Bezel



Part Number 0549731 12-24V ECE LED LHT High & Low Beam Headlight with FP, DRL & Chrome Inner Bezel



Part Number 0549741 12-24V ECE LED RHT High & Low Beam Headlight with FP, DRL & Black Inner Bezel



Part Number 0550201 12-24V ECE LED LHT High & Low Beam Headlight with Black Inner Bezel



Part Number 0550211 12-24V ECE LED LHT High & Low Beam Headlight with Chrome Inner Bezel



Part Number 0550221 12-24V ECE LED RHT High & Low Beam Headlight with Black Inner Bezel