

LED Headlights - Model 8900 Evolution 2

PRODUCT INFORMATION

| | |
|--------------------------------------|---|
| Description | 12-24V ECE LED LHT High & Low Beam Headlight with Black Inner Bezel |
| Height | 141.99 mm / 5.59 in |
| Width | 199.90 mm / 7.87 in |
| Depth | 95.00 mm / 3.74 in |
| Shape | Rectangular |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Die-Cast Aluminum |
| Housing Color | Black |
| Bezel Color | Black |
| Retrofits | 2B1 5" X 7" Headlights |
| Minimum Operating Temperature | -40 °C / -40 °F |
| Maximum Operating Temperature | 65 °C / 149 °F |
| Connector or Wiring | H4 |
| Mating Connector | H4 AMP#172615-2 |
| Product Weight | 2.80 lbs / 1.27 kgs |
| Shipping Weight | 3.76 lbs / 1.71 kgs |



Print date: 2018-02-24

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER 
 Engineered. Lighting. Solutions.

LED Headlights - Model 8900 Evolution 2

PRODUCT DIMENSIONS



ELECTRICAL SPECIFICATIONS

| | |
|-----------------------------------|---------------------------------|
| Input Voltage | 12-24V DC |
| Operating Voltage | 10-32V DC |
| Transient Spike Protection | 150V Peak @ 1 HZ-100 Pulses |
| Black Wire | Ground |
| Yellow Wire | Low Beam |
| White Wire | High Beam |
| Red Wire | Front Position* |
| Current Draw | 1.94A @ 12V DC (High Beam) |
| | 1.67A @ 12V DC (Low Beam) |
| | 0.22A @ 12V DC (Front Position) |
| | 1.03A @ 24V DC (High Beam) |
| | 0.87A @ 24V DC (Low Beam) |
| | 0.16A @ 24V DC (Front Position) |

Print date: 2018-02-24

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Headlights - Model 8900 Evolution 2

REGULATORY STANDARDS COMPLIANCE




Buy America Standards
 ECE Reg 7
 IEC IP69K

ECE Reg 112
 Eco Friendly

PHOTOMETRIC SPECIFICATIONS

| | |
|-------------------------------|---|
| Raw Lumen Output | 2,640 (High Beam); 2,250 (Low Beam) |
| Effective Lumen Output | 1,200 (High Beam); 975 (Low Beam) |
| Beam Pattern(s) | Forward Lighting - High Beam (ECE) Forward Lighting - Low Beam (ECE Left Hand) Signalization - Front Position |

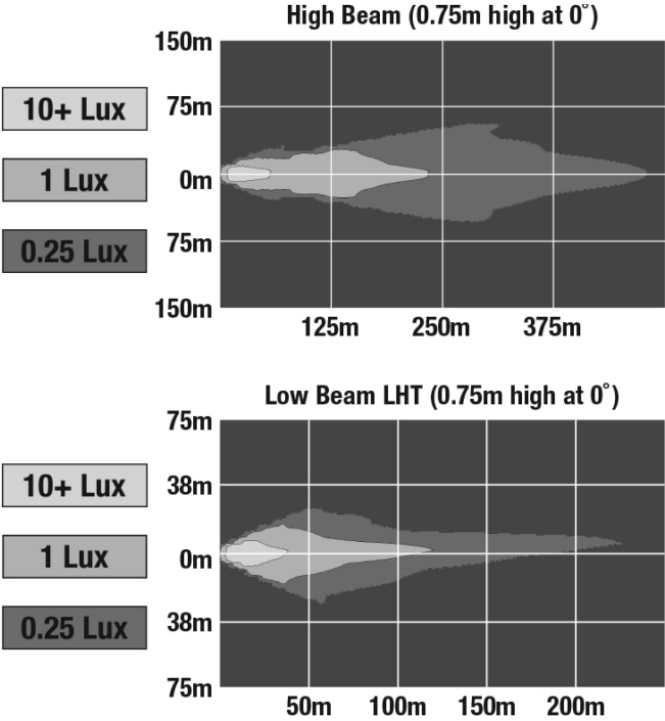

Print date: 2018-02-24

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660



LED Headlights - Model 8900 Evolution 2

APPLICATIONS



ADDITIONAL INFORMATION

*Front position light is a requirement outside the United States. If your bike is operated in the United States you do not need to connect this wire unless your bike is equipped with a front position light.

RELATED PRODUCTS



Part Number
0554431

12-24V ECE LED LHT
High & Low Beam
Headlight with Chrome
Inner Bezel



Part Number
0554471

12-24V DOT/ECE LED
RHT High & Low Beam
Headlight with Chrome
Inner Bezel



Part Number
0554491

12-24V DOT/ECE LED
RHT High & Low Beam
Headlight with Black
Inner Bezel