PRODUCT INFORMATION

Description 12-24V LED Green Zone Light

 Height
 123.70 mm / 4.87 in

 Width
 258.57 mm / 10.18 in

 Depth
 102.11 mm / 4.02 in

Shape Rectangular

Outer Lens MaterialGlassOuter Lens ColorClearHousing MaterialXenoyHousing ColorBlack

Mounting Hardware (x2) M8-1.25 Mounting Bolt

Description

Mounting Type Universal Pedestal Mount

Minimum Operating $-40 \, ^{\circ}\text{C} \, / \, -40 \, ^{\circ}\text{F}$

Temperature

Maximum Operating 65 °C / 149 °F

Temperature

Connector or Wiring Integrated 2-Pin Deutsch Weatherproof

Socket (DT04-2P)

Mating Connector Integrated 2-Pin Deutsch Weatherproof

Plug (DT06-2S)

Product Weight 2.60 lbs / 1.18 kgs **Shipping Weight** 3.08 lbs / 1.4 kgs

Additional Information Due to the chromaticity of the green


light, the green Model 527 will easily

shine through fog.





PRODUCT DIMENSIONS

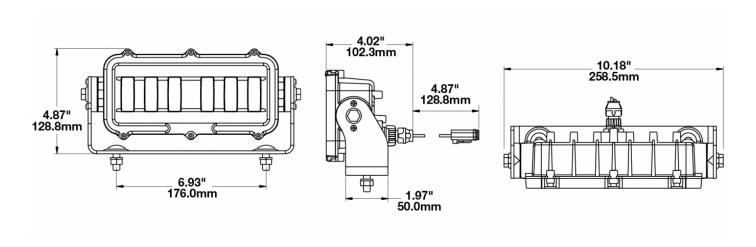

ELECTRICAL SPECIFICATIONS

Input Voltage 12-24V DC Operating Voltage 10-32V DC

Transient Spike Protection 150V Peak @ 1 HZ-100 Pul

Red Wire Positive
Black Wire Negative

Current Draw 1.2A @ 12V DC .8A @ 24V DC

REGULATORY STANDARDS COMPLIANCE







Buy America Standards IEC IP69K

Eco Friendly

Print date: 2024-04-25

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 1,500 **Effective Lumen** 590

Output

Beam Pattern(s) Forward Lighting - Spot

Warning - Keep Out Zone

APPLICATIONS



















PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

ACCESSORIES



Part Number 8200151 Rock Guard Kit for Model 527

Print date: 2024-04-25

RELATED PRODUCTS



Part Number 0549271 12-24V LED Red Zone Light



Part Number 0551261 12-24V LED White Zone Light



Part Number 0551281 12-24V LED Amber Zone Light



Part Number 0647011 12-24V LED Red & Green Signal Light



Part Number 0647021 12-24V LED Amber & Green Signal Light

