


# LED Light Bars - Model 9049-4M

## PRODUCT INFORMATION

<b>Description</b>	12V LED NonProgrammable LED 25" Light Bar with Flood Beam Pattern
<b>Height</b>	102.87 mm / 4.05 in
<b>Width</b>	727.71 mm / 28.65 in
<b>Depth</b>	93.22 mm / 3.67 in
<b>Shape</b>	Rectangular
<b>Outer Lens Material</b>	Polycarbonate
<b>Outer Lens Color</b>	Clear
<b>Housing Material</b>	Die-Cast Aluminum
<b>Housing Color</b>	Black
<b>Mounting Type</b>	Universal Mount
<b>Minimum Operating Temperature</b>	-40 °C / -40 °F
<b>Maximum Operating Temperature</b>	65 °C / 149 °F
<b>Connector or Wiring</b>	10" Bare Leads
<b>Product Weight</b>	7.55 lbs / 3.42 kgs



## PRODUCT DIMENSIONS

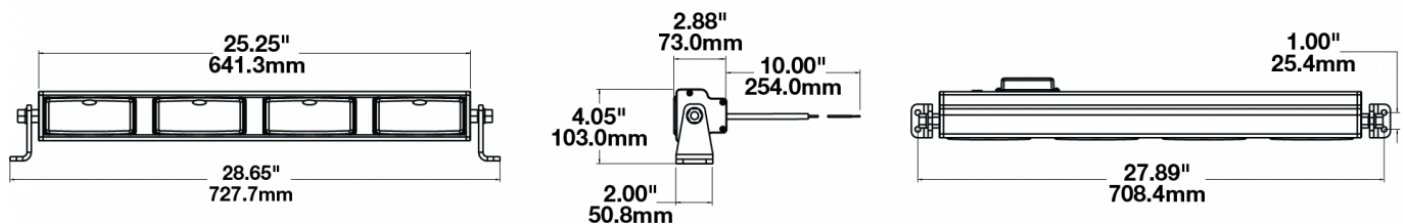

Print date: 2017-11-23

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.  
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**  
 Engineered. Lighting. Solutions.

# LED Light Bars - Model 9049-4M

## ELECTRICAL SPECIFICATIONS

<b>Input Voltage</b>	12V DC
<b>Operating Voltage</b>	9-18V DC
<b>Red Wire</b>	Positive
<b>Black Wire</b>	Negative
<b>Current Draw</b>	8.00A @ 12V DC

## REGULATORY STANDARDS COMPLIANCE



Buy America Standards

IEC IP67


Tested to ECE Reg. 10  
(Radiated Emissions only)

Eco Friendly

SAE J1113-21

## PHOTOMETRIC SPECIFICATIONS

<b>Raw Lumen Output</b>	4,400
<b>Effective Lumen Output</b>	2,640
<b>Nominal LED Color Temperature</b>	5000 K
<b>Beam Pattern(s)</b>	Forward Lighting - Flood (Standard)

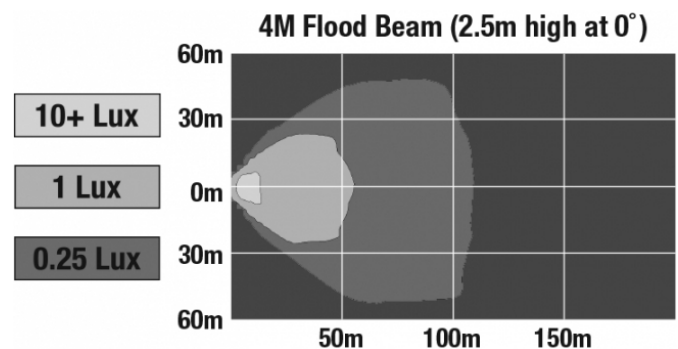

Print date: 2017-11-23

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# LED Light Bars - Model 9049-4M

## APPLICATIONS



## ACCESSORIES



**Part Number**

**0842221**

4-Button Key Fob for  
Model 9049-4M

## RELATED PRODUCTS



**Part Number**

**0546021**

12V LED 25" Light Bar  
with Driving Beam  
Pattern



**Part Number**

**0546291**

24V LED 25" Light Bar  
with Flood Beam  
Pattern

Print date: 2017-11-23

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660