


LED Light Bars - Model 9049-4M

PRODUCT INFORMATION

Description	24V LED 25" Light Bar with Flood Beam Pattern
Height	102.87 mm / 4.05 in
Width	727.71 mm / 28.65 in
Depth	93.22 mm / 3.67 in
Shape	Rectangular
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Die-Cast Aluminum
Housing Color	Black
Mounting Type	Universal Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	10" Bare Leads
Product Weight	7.55 lbs / 3.42 kgs
Shipping Weight	8.35 lbs / 3.79 kgs



PRODUCT DIMENSIONS

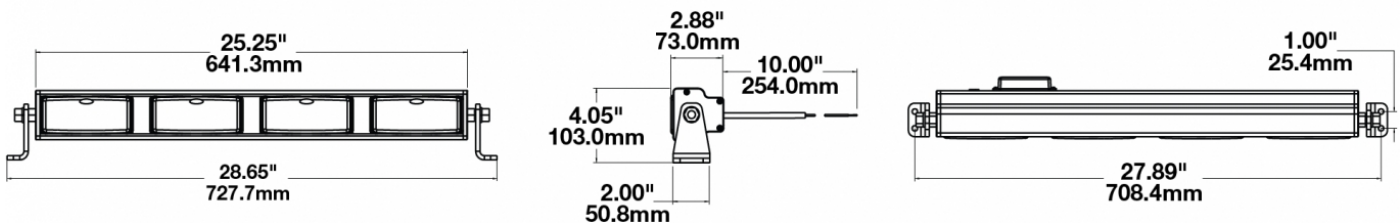

Print date: 2018-10-21

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Light Bars - Model 9049-4M

ELECTRICAL SPECIFICATIONS

Input Voltage	24V DC
Operating Voltage	20-32V DC
Red Wire	Positive
Black Wire	Negative
Current Draw	4.80A @ 24V DC

REGULATORY STANDARDS COMPLIANCE



Buy America Standards

IEC IP67


Tested to ECE Reg. 10
(Radiated Emissions only)

Eco Friendly

SAE J1113-21

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	4,400
Effective Lumen Output	2,640
Nominal LED Color Temperature	5000 K
Beam Pattern(s)	Forward Lighting - Flood (Standard)

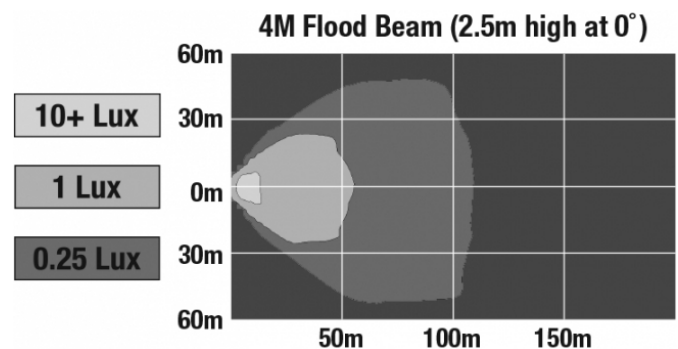

Print date: 2018-10-21

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Light Bars - Model 9049-4M

APPLICATIONS



ACCESSORIES



Part Number

0842221

4-Button Key Fob for
Model 9049-4M

RELATED PRODUCTS



Part Number

0545331

12V LED
NonProgrammable
LED 25" Light Bar with
Flood Beam Pattern



Part Number

0546021

12V LED 25" Light Bar
with Driving Beam
Pattern

Print date: 2018-10-21

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660