


LED Light Bar - Model 9901

PRODUCT INFORMATION

Description	12-24V ECE LED High Beam Auxiliary Light with Bracket Mount
Height	83.00 mm / 3.27 in
Width	334.00 mm / 13.15 in
Depth	86.10 mm / 3.39 in
Shape	Rectangular
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Aluminum
Housing Color	Black
Bezel Color	Black
Mounting Hardware Description	(x2) M8-1.25 x 25mm SS Carriage Bolt
Mounting Type	Universal Pedestal Mount
Connector or Wiring	Wire Asm, Deutsch DT06-2S
Product Weight	0.60 lbs / 0.27 kgs
Shipping Weight	4.05 lbs / 1.84 kgs



PRODUCT DIMENSIONS

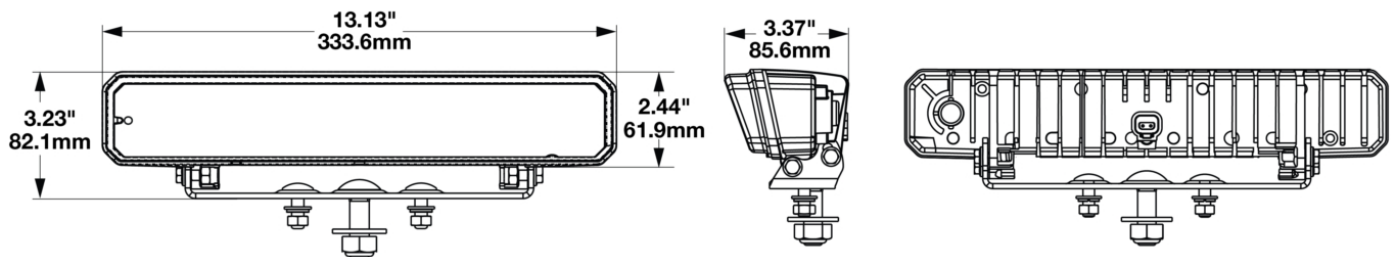

Print date: 2026-06-17

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Light Bar - Model 9901

ELECTRICAL SPECIFICATIONS

Input Voltage	12/24V DC
Operating Voltage	9-30V DC
Transient Spike Protection	150V Peak @ 1 HZ-100 Pulses
Red Wire	Power
Black Wire	Ground
Current Draw	5.0A @ 12V DC (High Beam) 2.7A @ 24V DC (High Beam)

REGULATORY STANDARDS COMPLIANCE




ECE Reg 10
IEC IP67

ECE Reg 149 - HR

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	9,800
Effective Lumen Output	1,650
Candela Output	Max 150,000
Beam Pattern(s)	Forward Lighting - High Beam (ECE)

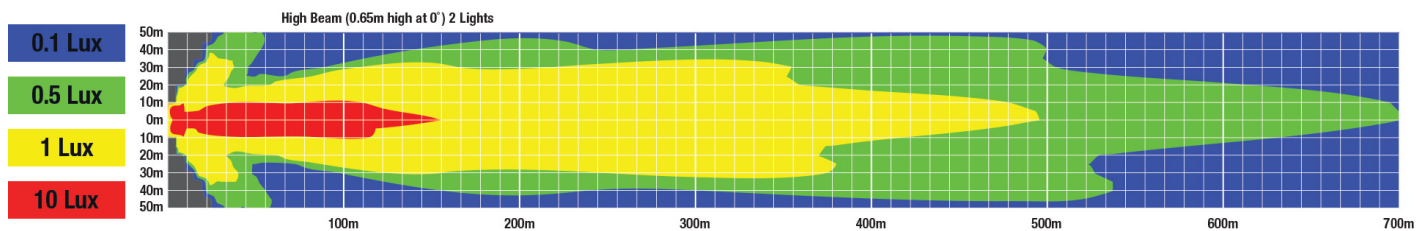

Print date: 2026-06-17

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Light Bar - Model 9901

APPLICATIONS



PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

RELATED PRODUCTS



Part Number

0561531

12-24V ECE LED

Heated High Beam

Auxiliary Light with

Bracket Mount

Print date: 2026-06-17

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.

www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660