


LED Marine Navigation Lights - Model 450

PRODUCT INFORMATION

| | |
|--------------------------------------|---|
| Description | 12-24V LED Port (Red) Marine Signal Light |
| Height | 33.02 mm / 1.3 in |
| Width | 198.12 mm / 7.8 in |
| Depth | 43.18 mm / 1.7 in |
| Shape | Stylized |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Polycarbonate |
| Housing Color | White |
| Mounting Type | Low Profile Mount |
| Minimum Operating Temperature | -40 °C / -40 °F |
| Maximum Operating Temperature | 65 °C / 149 °F |
| Connector or Wiring | 12" Bare Leads |
| Product Weight | 0.24 lbs / 0.11 kgs |
| Shipping Weight | 3.71 lbs / 1.68 kgs |



PRODUCT DIMENSIONS

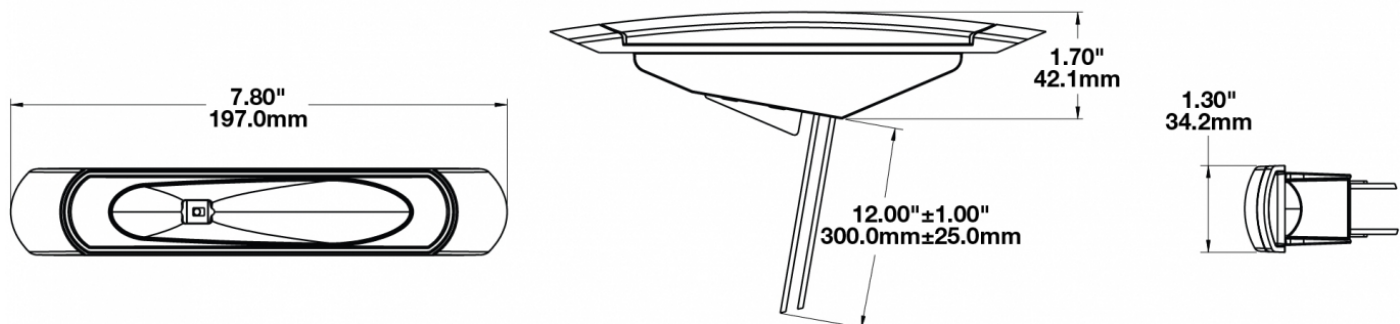

Print date: 2024-07-27

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Marine Navigation Lights - Model 450

ELECTRICAL SPECIFICATIONS

| | |
|----------------------|----------------------------------|
| Input Voltage | 12-24V DC |
| Red Wire | Positive |
| Black Wire | Negative |
| Current Draw | 0.21A @ 12V DC 0.10A @ 24V DC |

REGULATORY STANDARDS COMPLIANCE



ABYC A-16
Eco Friendly
USCG COLREGS Part C

Buy America Standards
IEC IP67

PHOTOMETRIC SPECIFICATIONS

Nominal LED Color Temperature 5000 K

APPLICATIONS



PRODUCT WARNINGS

For California residents:

⚠️ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠️ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.


Print date: 2024-07-27

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
Engineered. Lighting. Solutions.

LED Marine Navigation Lights - Model 450

RELATED PRODUCTS



Part Number
0230691

12-24V LED Starboard
(Green) Marine Signal
Light

Part Number
0230701

12-24V LED Stern
(White) Marine Signal
Light