LED Auxiliary Lights - Model TS4000

PRODUCT INFORMATION

Description 12-24V ECE LED High Beam with Black

Inner Bezel & Pedestal Mount - 2 Light

Kit

 Height
 177.80 mm / 7 in

 Width
 177.80 mm / 7 in

 Depth
 99.06 mm / 3.9 in

Shape Round

Outer Lens Material Polycarbonate

Outer Lens ColorClearHousing MaterialAluminumHousing ColorBlackBezel ColorBlack

Mounting Hardware Description (x1) 3/8"-16 x UNC

Mounting Type U Bracket
Minimum Operating -40 °C / -40 °F

Temperature

Maximum Operating 65 °C / 149 °F

Temperature


Connector or Wiring Integral Deutsch DT04-2P

Mating Connector DT06-2S

Product Weight 2.20 lbs / 1 kgs **Shipping Weight** 7.20 lbs / 3.27 kgs








LED Auxiliary Lights - Model TS4000

PRODUCT DIMENSIONS

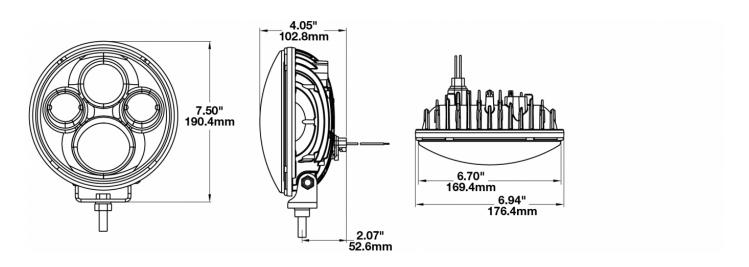

ELECTRICAL SPECIFICATIONS

Input Voltage12-24V DCOperating Voltage9-32V DCBlack WireGroundRed WirePositive

Current Draw 3.4A @ 12V DC 1.6A @ 24V DC

REGULATORY STANDARDS COMPLIANCE







Buy America Standards Eco Friendly ECE Reg 112 IEC IP67



LED Auxiliary Lights - Model TS4000

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 4160 (High Beam) **Effective Lumen** 1820 (High Beam)


Output

Candela Output 133,000 **Nominal LED Color** 5000 K

Temperature

Beam Pattern(s) Forward Lighting - Driving

Forward Lighting - High Beam (ECE)

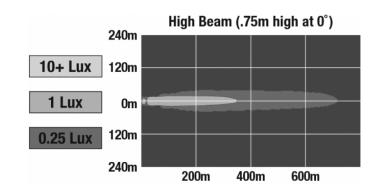

APPLICATIONS





RELATED PRODUCTS



Part Number 0551121 12-24V ECE LED High Beam with Chrome Inner Bezel & Pedestal Mount



0551603 12-24V ECE LED High Beam with Chrome Inner Bezel & Pedestal Mount - 2 Light Kit

