


LED Safety Lights - Model 793

PRODUCT INFORMATION

Description	12-110V LED Amber Stripe Zone Light
Height	48.00 mm / 1.89 in
Width	150.00 mm / 5.91 in
Depth	63.00 mm / 2.48 in
Shape	Rectangular
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Aluminum
Housing Color	Black
Bezel Color	Black
Mounting Hardware Description	(x1) 5/16"-18 x 1.00" Mounting Bolt Bracket
Mounting Type	Pedestal
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	Deutsch DT04-2P
Mating Connector	Deutsch DT06-2S with harness included with flying leads
Product Weight	0.87 lbs / 0.39 kgs
Shipping Weight	1.10 lbs / 0.5 kgs

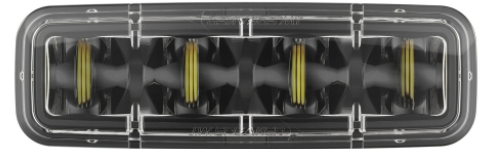


Print date: 2017-12-11

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER 
Engineered. Lighting. Solutions.

LED Safety Lights - Model 793

PRODUCT DIMENSIONS

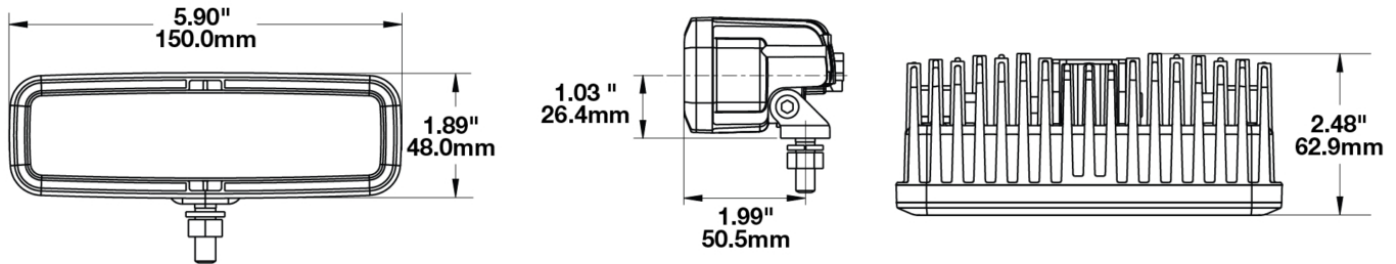

ELECTRICAL SPECIFICATIONS

Input Voltage	12-110V DC
Operating Voltage	9-125V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
Black Wire	Ground
Red Wire	Power
Current Draw	1.00A @ 12V DC 0.54A @ 24V DC 0.35A @ 48V DC 0.29A @ 80V DC 0.27A @ 110V DC

Print date: 2017-12-11

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Safety Lights - Model 793


REGULATORY STANDARDS COMPLIANCE



Buy America Standards	Eco Friendly
IEC IP67	IEC IP69K
Tested to ECE Reg. 10 (Radiated Emissions only)	UL Recognized

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	1,113
Effective Lumen Output	210
Candela Output	2,200
Beam Pattern(s)	Warning - Keep Out Zone

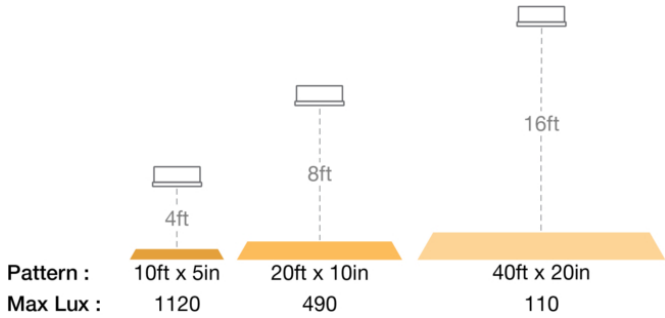

APPLICATIONS




Print date: 2017-12-11

© 2017 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660



LED Safety Lights - Model 793

RELATED PRODUCTS



Part Number
1603631
12-110V LED Red
Stripe Zone Light



Part Number
1603641
12-110V LED Blue
Stripe Zone Light