PRODUCT INFORMATION

Description
Height
Width
Depth
Shape
Outer Lens Material
Outer Lens Color
Housing Material
Housing Color
Bezel Color
Mounting Hardware Description
Mounting Type
Minimum Operating Temperature
Maximum Operating Temperature
Connector or Wiring
Mating Connector
Product Weight

Product Weight Shipping Weight 12-36V LED Red Stripe Zone Light with Shroud 48.00 mm / 1.89 in 150.00 mm / 5.91 in 97.00 mm / 3.82 in Rectangular Polycarbonate Clear Aluminum Black Black (x1) 5/16"-18 x 1.00" Mounting Bolt Bracket Pedestal -40 °C / -40 °F 65 °C / 149 °F Deutsch DT04-2P


Deutsch DT04-2P Deutsch DT06-2S with harness included with flying leads 0.90 lbs / 0.41 kgs 1.25 lbs / 0.57 kgs







PRODUCT DIMENSIONS

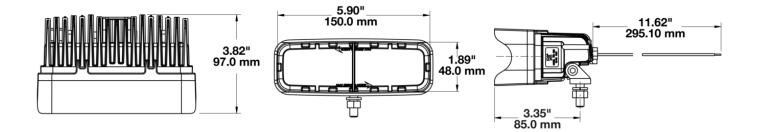

ELECTRICAL SPECIFICATIONS

Input Voltage	12-36V DC
Operating Voltage	10-45V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
Black Wire	Ground
Red Wire	Power
Current Draw	1.60A @ 12V DC 0.60A @ 24V DC 0.57A @ 36V DC

REGULATORY STANDARDS COMPLIANCE



Buy America Standards IEC IP67 **UL** Recognized

Print date: 2025-07-17

Eco Friendly IEC IP69K





PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	1,130				
Effective Lumen Output	317				
Candela Output	3,150				16ft
Beam Pattern(s)	Warning - Keep Out Zone			8ft	
			4ft		
		Pattern :	10ft x 5in	20ft x 10in	40ft x 20in

Max Lux :

1120

490

110

APPLICATIONS





PRODUCT WARNINGS

For California residents:

WARNING: Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - <u>www.P65Warnings.ca.gov</u>.



ACCESSORIES



Part Number 8201241 **DIN Pole Mount for** Work Lights

RELATED PRODUCTS





Part Number **1603781** 12-36V Amber Stripe Zone Light, Long Bracket



Part Number 1603791 12-36V Red Stripe with Shroud, Long Bracket

Part Number

1603811 48-110V LED Red Stripe Zone Light, Short Bracket



Print date: 2025-07-17 © 2025 J.W. Speaker Corporation • Germantown, WI U.S.A. www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660