PRODUCT INFORMATION

Description 12-24V ECE/SAE Single-Sided LED Stop &

Tail Light without Guard

 Height
 124.71 mm / 4.91 in

 Width
 124.71 mm / 4.91 in

 Depth
 23.11 mm / 0.91 in

Shape Round

Outer Lens Material Polycarbonate

Outer Lens Color Red

Housing Material Polycarbonate

Housing Color Black

Mounting Hardware Description (x1) 1/2"-13 x 1.25" Hollow Mounting

Stud

65 °C / 149 °F

Mounting TypeHollow Stud MountMinimum Operating-40 °C / -40 °F

Temperature


Maximum Operating

Temperature

Connector or Wiring12" Bare LeadsProduct Weight0.39 lbs / 0.18 kgsShipping Weight1.80 lbs / 0.82 kgs



PRODUCT DIMENSIONS

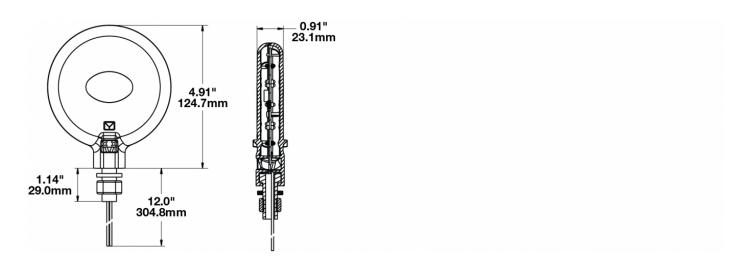

ELECTRICAL SPECIFICATIONS

Input Voltage 12-24V DC **Black Wire** Ground **Red Wire** Stop **White Wire** Tail

Current Draw 0.100 A @ 12V DC (Stop)

0.05A @ 24V DC (Stop) 0.010A @ 12V DC (Tail) 0.006A @ 24V DC (Tail)



REGULATORY STANDARDS COMPLIANCE















ASABE S279

ECE Reg 7 FMVSS 108 Table IX

IEC IP67 SAE J585 Buy America Standards

Eco Friendly

FMVSS 108 Table VIII

SAE J2040 SAE J586

PHOTOMETRIC SPECIFICATIONS

Beam Pattern(s) Signalization - Stop

Signalization - Tail

APPLICATIONS


















RELATED PRODUCTS



Part Number 0341681 12-24V SAE Double-Sided LED Turn Signal without Guard



Part Number 0341931 12-24V SAE Double-Sided LED Turn Signal with Guard



Part Number 0342781 12-24V ECE/SAE Single-Sided LED Stop & Tail Light with Guard