PART NUMBER 0338111


LED Signal Lights - Model 221


PRODUCT INFORMATION

Description	12-24V ECE LED Front Position & Front Turn Signal Light
Height	160.78 mm / 6.33 in
Width	66.04 mm / 2.6 in
Depth	27.94 mm / 1.1 in
Shape	Rectangle
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Polycarbonate
Housing Color	Black
Mounting Type	Panel Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	Integral DT04-6P
Mating Connector	DT06-6S
Product Weight	0.39 lbs / 0.18 kgs
Shipping Weight	0.50 lbs / 0.23 kgs



PRODUCT DIMENSIONS

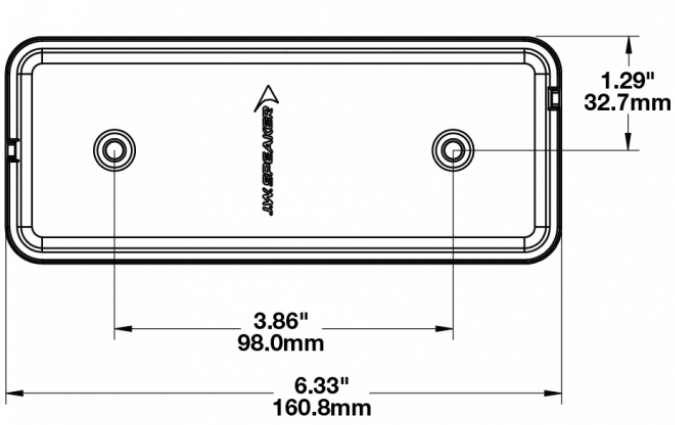

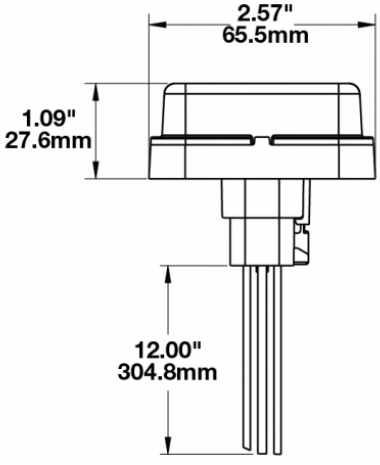

Print date: 2026-11-13

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.

www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER® Engineered. Lighting. Solutions.

PART NUMBER 0338111

LED Signal Lights - Model 221

ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Operating Voltage	6-32V DC
Transient Spike Protection	150V Peak @ 1 HZ-100 Pulses
Black Wire	Ground
White Wire	Front Position
Tellow Wire	Turn
Current Draw	1.42A @ 12V DC (Turn) 0.71A @ 24V DC (Turn) 0.10A @ 12V DC (Position) 0.05A @ 24V DC (Position)

REGULATORY STANDARDS COMPLIANCE



Buy America Standards
ECE Reg 6
ECE Reg 7
Eco Friendly
IEC IP67

PHOTOMETRIC SPECIFICATIONS

Beam Pattern(s)	Signalization - Front Position Signalization - Turn (Front)


© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER® Engineered. Lighting. Solutions.

PART NUMBER 0338111

LED Signal Lights - Model 221

APPLICATIONS

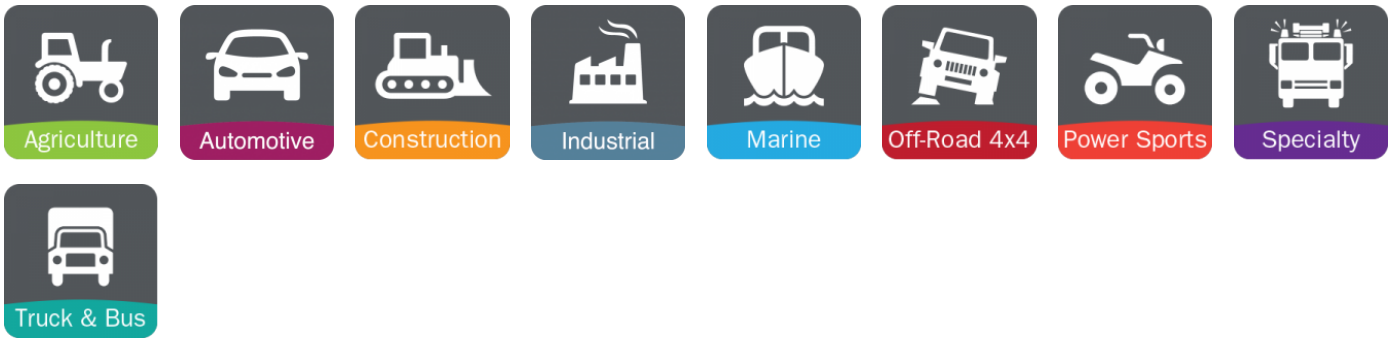

PRODUCT WARNINGS

For California residents:
⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.
⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER® Engineered. Lighting. Solutions.