


LED Headlight - Model 9800

PRODUCT INFORMATION

| | |
|--------------------------------------|---|
| Description | 12-24V ECE LED LHT Non-Heated Headlight - 2 Light Kit |
| Height | 94.53 mm / 3.72 in |
| Width | 291.58 mm / 11.48 in |
| Depth | 133.17 mm / 5.24 in |
| Shape | Rectangular |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Xenoy |
| Housing Color | Black |
| Bezel Color | Black |
| Mounting Hardware Description | (x8) M8 - 1.25-80 mm x 25 mm SS Carriage Bolt |
| Mounting Type | Universal Pedestal Mount |
| Connector or Wiring | 6-Pin Delphi (#12052848) |
| Mating Connector | Delphi (#12052848) |
| Product Weight | 0.00 lbs / 0 kgs |
| Shipping Weight | 9.55 lbs / 4.33 kgs |



PRODUCT DIMENSIONS

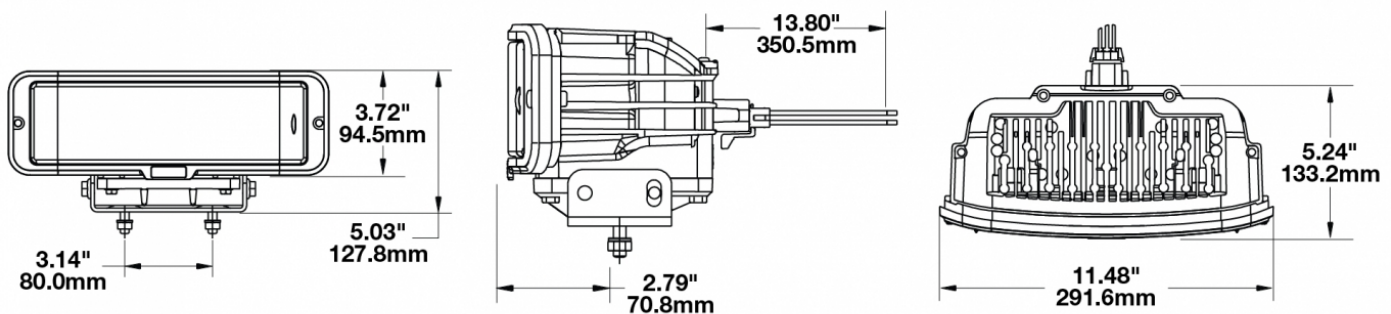

Print date: 2018-11-17

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Headlight - Model 9800

ELECTRICAL SPECIFICATIONS

| | |
|--------------------------|--|
| Input Voltage | 12-24V DC |
| Operating Voltage | 10-32V DC |
| Red Wire | Front Position |
| Black Wire | Ground |
| White Wire | High Beam |
| Yellow Wire | Turn |
| Blue Wire | DRL |
| Orange Wire | Low Beam |
| Current Draw | 2.70A @ 12V DC (Low Beam) 3.40A @ 12V DC (High Beam) 0.85A @ 12V DC (Turn Signal) 0.04A @ 12V DC (Front Position / DRL) 1.20A @ 24V DC (Low Beam) 1.60A @ 24V DC (High Beam) 0.27A @ 24V DC (Turn Signal) 0.03A @ 24V DC (Front Position / DRL) |

REGULATORY STANDARDS COMPLIANCE



| | |
|-----------------------|--------------|
| Buy America Standards | ECE Reg 112 |
| ECE Reg 6 | ECE Reg 7 |
| ECE Reg 87 | Eco Friendly |
| IEC IP67 | |

Print date: 2018-11-17


© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER®
Engineered. Lighting. Solutions.

LED Headlight - Model 9800

PHOTOMETRIC SPECIFICATIONS

| | |
|-------------------------------|---|
| Raw Lumen Output | 2,880 (High Beam); 2,160 (Low Beam) |
| Effective Lumen Output | 1,150 (high beam); 800 (Low Beam) |
| Beam Pattern(s) | Forward Lighting - High Beam (DOT/ECE) Forward Lighting - Low Beam (ECE Left Hand) Signalization - Turn (Front) |

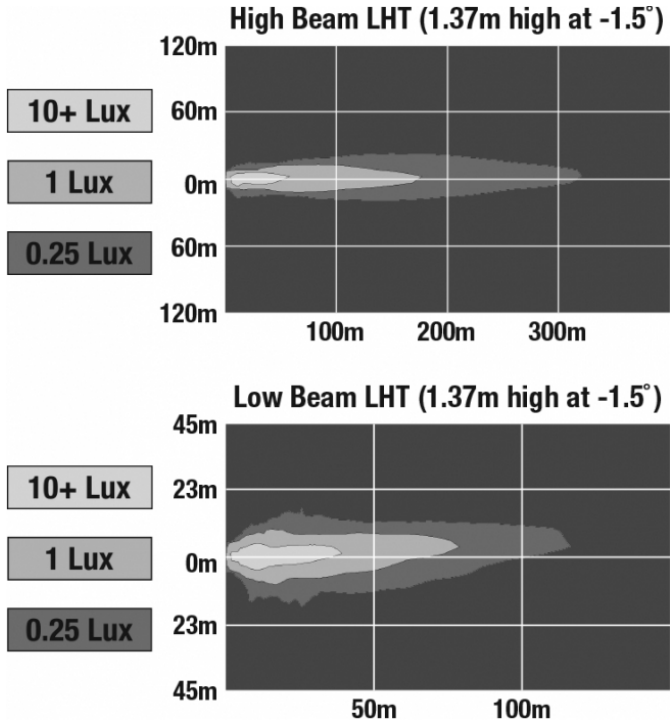

APPLICATIONS



ADDITIONAL INFORMATION

J.W. Speaker’s Model 9800 is best suited for normal snow plowing, not “high speed” plowing on highways. Consult with your J.W. Speaker salesperson for more information.

The Model 9800 is not designed to be a plug and play for Boss snow plows. If you have a Boss snow plow please see your local Boss dealer for information on the right product to use.

Lamp design integrates acceptance of mating connector Delphi #1205848

Print date: 2018-11-17

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660



LED Headlight - Model 9800

RELATED PRODUCTS



Part Number
0550061
12-24V DOT LED Non-Heated Headlight - 2 Light Kit



Part Number
0550161
12-24V ECE LED RHT Non-Heated Headlight - 2 Light Kit



Part Number
0551803
24V DOT LED Heated Headlight - 2 Light Kit



Part Number
0551833
24V ECE LED RHT Heated Headlight - 2 Light Kit



Part Number
0551863
24V ECE LED LHT Heated Headlight - 2 Light Kit



Part Number
0552243
12V DOT LED Heated Headlight - 2 Light Kit



Part Number
0552423
12V ECE LED RHT Heated Headlight - 2 Light Kit



Part Number
0552433
12V ECE LED LHT Heated Headlight - 2 Light Kit