
PRODUCT INFORMATION

Description	12V ECE LED LHT Heated Headlight - 2 Light Kit	
Height	94.53 mm / 3.72 in	
Width	291.58 mm / 11.48 in	
Depth	133.17 mm / 5.24 in	
Shape	Rectangular	
Outer Lens Material	Polycarbonate	
Outer Lens Color	Clear	
Housing Material	Xenoy	
Housing Color	Black	
Bezel Color	Black	
Mounting Hardware Description	(x4) M8-1.25 x 25 mm OR (x2) 1/2"-13 x 1.75" SS Carraige Bolt	
Mounting Type	Universal Pedestal Mount	MODEL
Retrofits	Pedestal Mount Snow Plow Lights	9800
Mating Connector	Delphi (#12052848)	
Product Weight	9.06 lbs / 4.11 kgs	Smart Heat
Shipping Weight	10.21 lbs / 4.63 kgs	HEATED LIGHTING TECHNOLOGY

PRODUCT DIMENSIONS



Print date: 2024-04-24 © 2024 J.W. Speaker Corporation • Germantown, WI U.S.A. www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

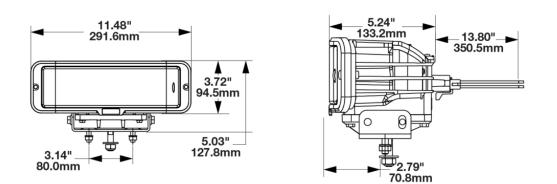

ELECTRICAL SPECIFICATIONS

Innut Valtaga	12V DC
Input Voltage	12V DC
Operating Voltage	8-15V DC
Red Wire	Front Position
Black Wire	Ground
White Wire	High Beam
Yellow Wire	Turn
Blue Wire	DRL
Orange Wire	Low Beam
Current Draw	2.70A @ 12V DC (Low Beam) 3.60A @ 12V DC (High Beam) 0.85A @ 12V DC (Turn Signal) 0.10A @ 12V DC (Front Position / DRL)

REGULATORY STANDARDS COMPLIANCE



Buy America Standards		
ECE Reg 112		
ECE Reg 7		
Eco Friendly		





PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	2,880 (High Beam); 2,160 (Low Beam)	High Beam LHT (1.37m high at -1.5°) 120m
Effective Lumen Output	1,150 (High Beam); 800 (Low Beam)	10+ Lux 60m
Candela Output	52,000	
Nominal LED Color Temperature	5000 K	
Beam Pattern(s)	Forward Lighting - High Beam	0.25 Lux ^{60m}
	(ECE) Forward Lighting - Low Beam (ECE Left Hand) Signalization - Turn (Front)	120m 100m 200m 300m
		Low Beam LHT (1.37m high at -1.5°)
		45m
		10+ Lux 23m
		1 Lux Om
		0.25 Lux 23m

45m

APPLICATIONS



INSTALLATION & APPLICATION INFORMATION

Pedestal mount snow plow lights for single or double bolt mounts. Each lamp comes with mounting hardware for single bolt mount included ($1/2-13 \times 1.75$ SS Carriage Bolt with hex nut and washer), in addition to the 2 M8-1.25 x 25 SS Carriage Bolts for double bolt mounts.



50m

100m

ADDITIONAL INFORMATION

J.W. Speaker's Model 9800 is best suited for normal snow plowing, not "high speed" plowing on highways. Consult with your J.W. Speaker salesperson for more information.

The Model 9800 is not designed to be a plug and play for Boss snow plows. If you have a Boss snow plow please see your local Boss dealer for information on the right product to use.

Lamp design integrates acceptance of mating connector Delphi #1205848

SMARTHEAT™ HEATING SYSTEM

The SmartHeat[™] heating system senses ambient temperature and turns the integrated heating system in the lens on & off. This system actually clears ice & snow twice as fast as conventional halogen lamps.

When does the heater turn on?

Heater turns on or off according to temperature changes and vehicle power:

- Heater will turn on when temperatures drop, generating enough heat to prevent ice build-up.
- Heater will turn on when powering up, de-icing the light as rapidly as possible.

When does the heater turn off?

Heater will turn off when it senses temperatures increase and are above the high temperature threshold.

Learn more about this technology here.

See Additional Information on page 1 for heated wire installation

PRODUCT WARNINGS

For California residents: ▲ WARNING: Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>. ▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - <u>www.P65Warnings.ca.gov</u>.



RELATED PRODUCTS





Part Number 0550061 12-24V DOT LED Non-Heated Headlight - 2 Light Kit

Part Number 0550161

12-24V ECE LED RHT Non-Heated Headlight - 2 Light Kit



Part Number 0550171 12-24V ECE LED LHT Non-Heated Headlight - 2 Light Kit



Part Number 0551803 24V DOT LED Heated

Headlight - 2 Light Kit



Part Number 0551833 24V ECE LED RHT Heated Headlight - 2 Light Kit



<u>055186</u>3

Light Kit



Part Number 24V ECE LED LHT Heated Headlight - 2



Part Number 0552423 12V ECE LED RHT Heated Headlight - 2 Light Kit

