


Heated Oval LED Signal Light - Model 274

PRODUCT INFORMATION

Description	12-24V DOT LED Heated Red Stop, Tail, & Turn Light
Height	57.00 mm / 2.24 in
Width	165.50 mm / 6.52 in
Depth	21.00 mm / 0.83 in
Shape	Oval
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Polycarbonate
Housing Color	Black
Bezel Color	Red
Mounting Type	Grommet/Flange Bracket
Retrofits	Standard 2" x 6" Signal Lights
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	50 °C / 122 °F
Mating Connector	3-Pin AMP Connector (282087-1)
Product Weight	0.35 lbs / 0.16 kgs
Shipping Weight	1.35 lbs / 0.61 kgs

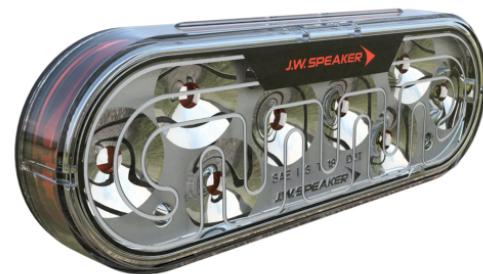


Print date: 2026-01-20

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660


Heated Oval LED Signal Light - Model 274

PRODUCT DIMENSIONS

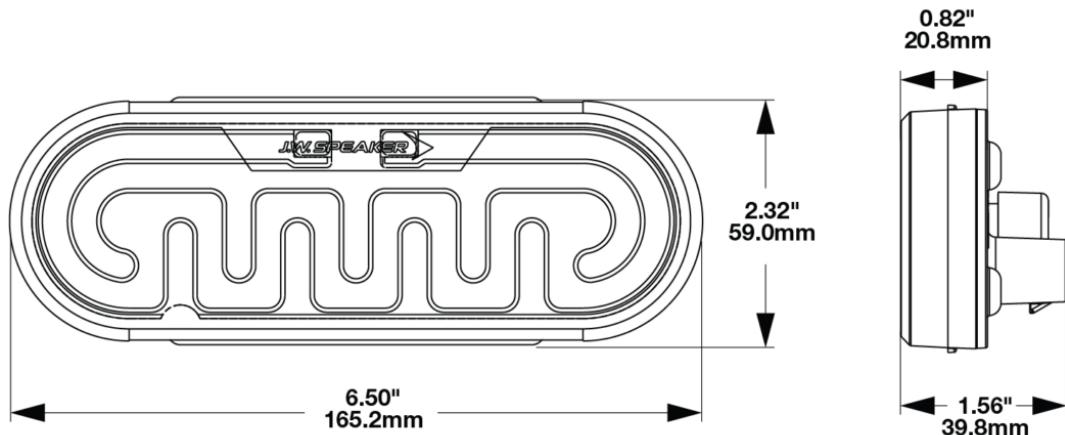

Pin Out Information

LIGHT (Socket shown ↑ top)



WIRE HARNESS*



*Wire harness sold separately on Part # 0346701.
Wire harness included on Part # 0346704.
Also available as a single accessory (Part # 3270501)

Print date: 2026-01-20

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

Heated Oval LED Signal Light - Model 274

ELECTRICAL SPECIFICATIONS

Input Voltage	10-30V DC
Operating Voltage	12-24V DC
Transient Spike Protection	150V Peak @ 1 HZ-100 Pulses
Current Draw	0.15A @ 12V DC (Turn) 0.15A @ 24V DC (Turn) 0.15A @ 12V DC (Stop) 0.15A @ 24V DC (Stop) 1.2A @ 12V DC (Tail Heated) 1.2A @ 24V DC (Tail Heated)

REGULATORY STANDARDS COMPLIANCE



Buy America Standards	Eco Friendly
FMVSS 108 s7.1 (Table VII)	FMVSS 108 s7.2 (Table VIII)
FMVSS 108 s7.3 (Table IX)	SAE J585
SAE J586	SAE J588

PHOTOMETRIC SPECIFICATIONS

Beam Pattern(s)	Signalization - Stop Signalization - Tail Signalization - Turn (Rear)
------------------------	---

APPLICATIONS



Print date: 2026-01-20

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

Heated Oval LED Signal Light - Model 274

INSTALLATION & APPLICATION INFORMATION

Installation requires the black wire (Tail w/ Heater) to be powered in order for the heater to work. Only power supplied to the black wire will power the heater. If power is not supplied to the heater, the light will not be heated. Current Draws will differ based upon whether or not the heater is powered and activated. Turn off power before installing.

PRODUCT WARNINGS

For California residents:

- ⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.
- ⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

ACCESSORIES



Part Number
4242891

Rubber Mounting
Grommet for Model
274



Part Number
5870261

Plastic Mounting
Flange for Model 274



Part Number
8200581

Steel L-Shaped
Mounting Bracket for
Model 274



Part Number
8200591

Chrome Plastic Trim
Ring for Model 274



Part Number
3270501

3-Pin AMP Connector
Wire Harness
Assembly

Heated Oval LED Signal Light - Model 274

RELATED PRODUCTS

**Part Number**
0346704

12-24V DOT LED
Heated Red Stop, Tail,
& Turn Light with
Harness

**Part Number**
0346711

12-24V DOT LED
Heated Amber Rear
Turn Light

**Part Number**
0346714

12-24V DOT LED
Heated Amber Rear
Turn Light with
Harness

**Part Number**
0346721

12-24V DOT LED
Heated White Reverse
Light

**Part Number**
0346724

12-24V DOT LED
Heated White Reverse
Light with Harness

**Part Number**
0346781

12-24V DOT LED
Heated Amber Front
Position & Front Turn
Signal Light

**Part Number**
0346784

12-24V DOT LED
Heated Amber Front
Position & Front Turn
Signal Light with
Harness

**Part Number**
0346791

12-24V DOT LED
Heated Amber Side
Marker Light