


LED Utility Light - Model 186

PRODUCT INFORMATION

| | |
|--------------------------------------|---|
| Description | 12-24V LED Utility Light |
| Height | 54.10 mm / 2.13 in |
| Width | 72.14 mm / 2.84 in |
| Depth | 45.47 mm / 1.79 in |
| Shape | Rectangular |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Polycarbonate |
| Housing Color | Black |
| Mounting Type | Low Profile Mount |
| Minimum Operating Temperature | -40 °C / -40 °F |
| Maximum Operating Temperature | 65 °C / 149 °F |
| Connector or Wiring | Integrated 2-Pin Deutsch Socket (DT04-2P) |
| Mating Connector | 2-Pin Deutsch Plug (DT06-2S) |
| Product Weight | 0.11 lbs / 0.05 kgs |
| Shipping Weight | 0.90 lbs / 0.41 kgs |



PRODUCT DIMENSIONS

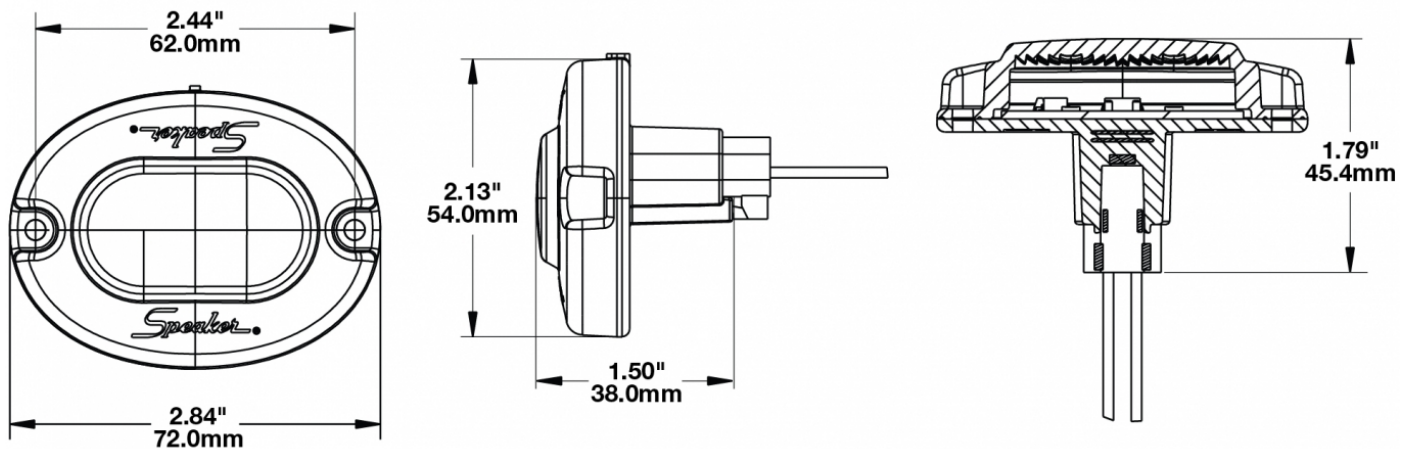

Print date: 2018-10-21

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
 Engineered. Lighting. Solutions.

LED Utility Light - Model 186

ELECTRICAL SPECIFICATIONS

| | |
|----------------------|------------------------------------|
| Input Voltage | 12-24V DC |
| Red Wire | Positive |
| Black Wire | Negative |
| Current Draw | 0.105A @ 12V DC 0.105A @ 24V DC |

REGULATORY STANDARDS COMPLIANCE




Buy America Standards
IEC IP67

Eco Friendly

PHOTOMETRIC SPECIFICATIONS

Nominal LED Color Temperature 5000 K

APPLICATIONS

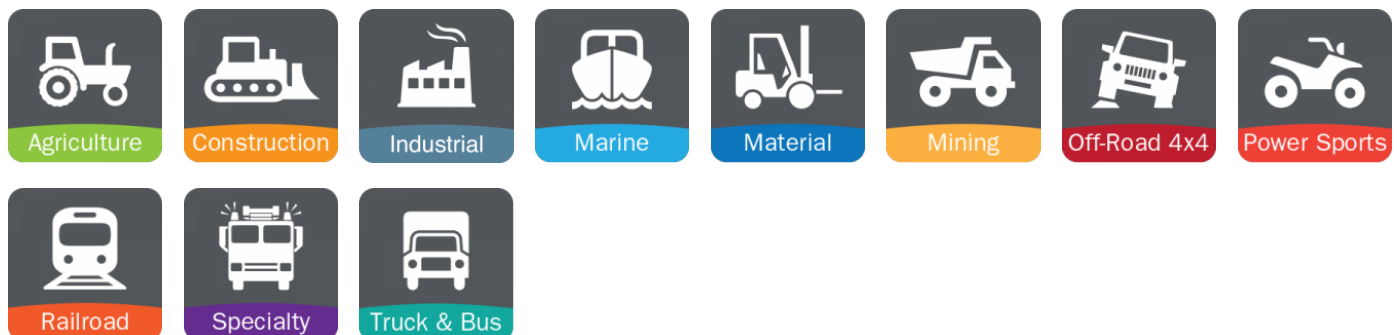

Print date: 2018-10-21

© 2018 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660