


# LED Utility Light - Model 186

## PRODUCT INFORMATION

<b>Description</b>	12-24V LED Utility Light
<b>Height</b>	54.10 mm / 2.13 in
<b>Width</b>	72.14 mm / 2.84 in
<b>Depth</b>	45.47 mm / 1.79 in
<b>Shape</b>	Rectangular
<b>Outer Lens Material</b>	Polycarbonate
<b>Outer Lens Color</b>	Clear
<b>Housing Material</b>	Polycarbonate
<b>Housing Color</b>	Black
<b>Mounting Type</b>	Low Profile Mount
<b>Minimum Operating Temperature</b>	-40 °C / -40 °F
<b>Maximum Operating Temperature</b>	65 °C / 149 °F
<b>Connector or Wiring</b>	Integrated 2-Pin Deutsch Socket (DT04-2P)
<b>Mating Connector</b>	2-Pin Deutsch Plug (DT06-2S)
<b>Product Weight</b>	0.11 lbs / 0.05 kgs
<b>Shipping Weight</b>	0.90 lbs / 0.41 kgs



## PRODUCT DIMENSIONS

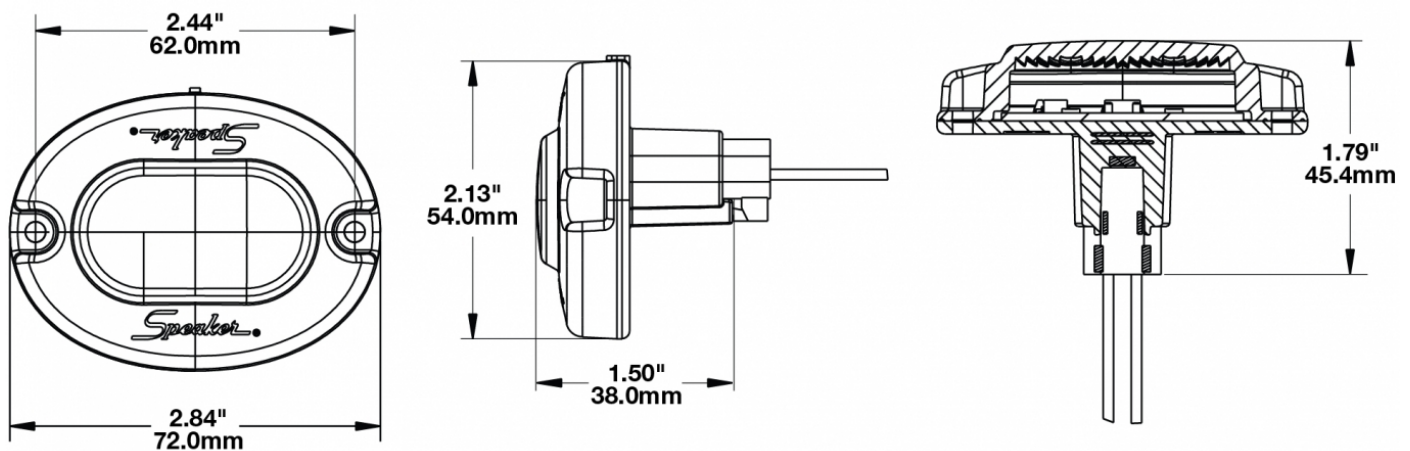

Print date: 2026-06-09

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**  
 Engineered. Lighting. Solutions.

# LED Utility Light - Model 186

## ELECTRICAL SPECIFICATIONS

<b>Input Voltage</b>	12-24V DC
<b>Red Wire</b>	Positive
<b>Black Wire</b>	Negative
<b>Current Draw</b>	0.105A @ 12V DC 0.105A @ 24V DC

## REGULATORY STANDARDS COMPLIANCE




Buy America Standards  
IEC IP67

Eco Friendly

## PHOTOMETRIC SPECIFICATIONS

**Nominal LED Color Temperature** 5000 K

## APPLICATIONS

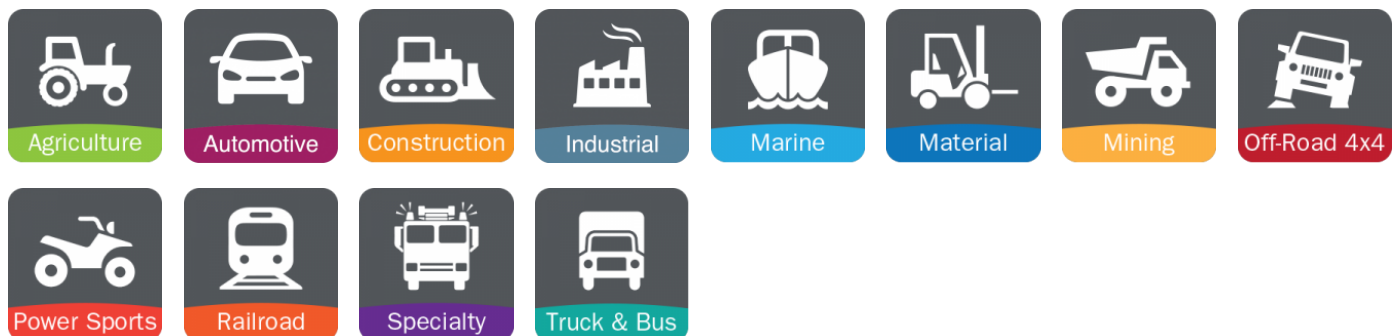

**Print date: 2026-06-09**

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# LED Utility Light - Model 186

## PRODUCT WARNINGS

---

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

---

**Print date: 2026-06-09**

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**   
*Engineered. Lighting. Solutions.*