PRODUCT INFORMATION

Description 12-24V LED Work Light with Scene

Beam Pattern and Flange Mounted

(Horizontal or Vertical)

 Height
 48.00 mm / 1.89 in

 Width
 304.00 mm / 11.97 in

 Depth
 29.00 mm / 1.14 in

Shape Stylized

Outer Lens Material PMMA

Outer Lens Color Clear

Housing Material PC/ABS


Housing Color Black

Connector or Wiring Harness


Mating ConnectorJAE MX19004S51Product Weight0.41 lbs / 0.19 kgsShipping Weight4.39 lbs / 1.99 kgs









PRODUCT DIMENSIONS

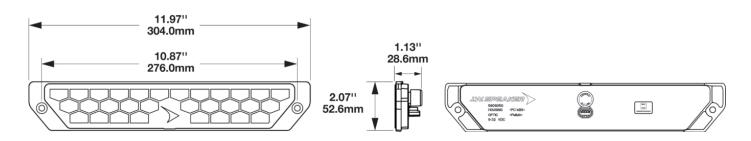

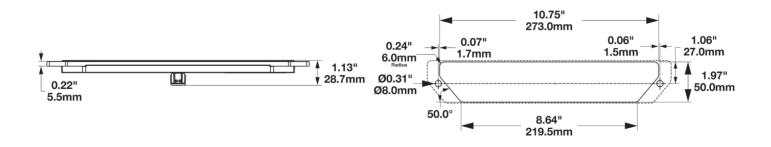



PIN	COLOR
PIN 1	RED
PIN 2	PLUG
PIN 3	PLUG
PIN 4	BLACK

ELECTRICAL SPECIFICATIONS

Input Voltage 12-24V DC
Operating Voltage 9-32V DC
Red Wire Power
Black Wire Ground

Current Draw 1.32A @ 12V DC (Worklamp)

.64A @ 24V DC (Worklamp)

REGULATORY STANDARDS COMPLIANCE



IEC IP67


PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 2800 Effective Lumen 1200

Output

Nominal LED Color 4750 K

Temperature

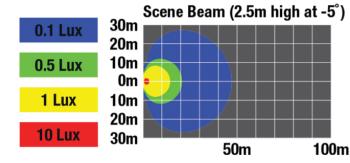

APPLICATIONS

















PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

RELATED PRODUCTS











Part Number 0443601

12-24V ECE LED Backup & Work Light with Flood Beam Pattern (Horizontal)



12-24V LED Work Light with Flood Beam Pattern and Post Mounted (Horizontal)

<u>Part Number</u> 1000391

12-24V LED Work Light with Flood Beam Pattern and Flange Mounted (Horizontal)

Part Number 1000411

12-24V LED Work Light with Flood Beam Pattern and Flange Mounted (Vertical)

Part Number 1000471

12-24V LED Work Light with Flood Beam Pattern and Post Mounted (Vertical)



Part Number 1000481

12-24V LED Work Light with Scene Beam Pattern and Post Mounted (Horizontal or Vertical)

