PRODUCT INFORMATION

Description 12-24V LED Driving Light with Flood

Beam Pattern

 Height
 48.00 mm / 1.89 in

 Width
 150.00 mm / 5.91 in

 Depth
 62.90 mm / 2.48 in

Shape Rectangular

Outer Lens Material Polycarbonate

Outer Lens ColorClearHousing MaterialAluminumHousing ColorBlackBezel ColorChrome

Mounting Hardware (x1) 8mm-20 x 25mm Mounting Bold

DescriptionBracketMounting TypePedestalMinimum Operating-40 °C / -40 °F

Temperature


Maximum Operating 65 °C / 149 °F

Temperature

Connector or WiringDeutsch DT04-2PMating ConnectorDeutsch DT06-2SProduct Weight0.91 lbs / 0.41 kgsShipping Weight1.10 lbs / 0.5 kgs



PRODUCT DIMENSIONS

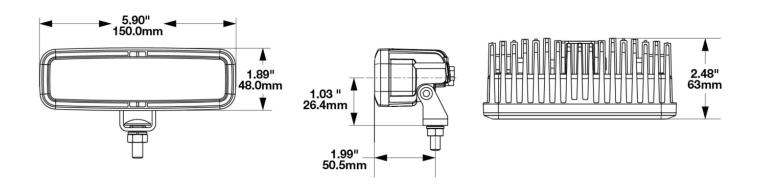

ELECTRICAL SPECIFICATIONS

Input Voltage12-24V DCOperating Voltage9-32V DC

Transient Spike Protection 150V Peak @ 1 HZ-100 Pulses

Current Draw 1.27A @ 12V DC 0.78A @ 24V DC

REGULATORY STANDARDS COMPLIANCE







Buy America Standards IEC IP67

Eco Friendly

Print date: 2025-12-01

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 1,820 **Effective Lumen** 1,200

Output


Nominal LED Color

Temperature

Beam Pattern(s) Forward Lighting - Flood

(Standard)

5000 K

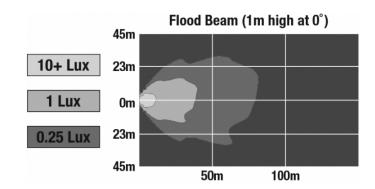

APPLICATIONS

















PRODUCT WARNINGS

For California residents:


▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

ACCESSORIES



Part Number 8201241 DIN Pole Mount for Work Lights





RELATED PRODUCTS



Part Number 1603511 12-24V LED Driving Light



Part Number 1603601 12V DOT/ECE LED Fog Light



Part Number 1603603 12V DOT/ECE LED Fog Light - 2 Light Kit