


LED Work Light - Model 774 XD

PRODUCT INFORMATION

Description	12-48V LED LHT Work Light with Spot & Turn Pattern - Bulk Qty (24 MIN)
Height	99.82 mm / 3.93 in
Width	144.02 mm / 5.67 in
Depth	56.90 mm / 2.24 in
Shape	Oval
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Polycarbonate
Housing Color	Black
Mounting Hardware Description	5/16"-18 x 1"
Mounting Type	Bottom Mount Bracket
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Product Weight	0.54 lbs / 0.24 kgs
Shipping Weight	14.45 lbs / 6.55 kgs



PRODUCT DIMENSIONS

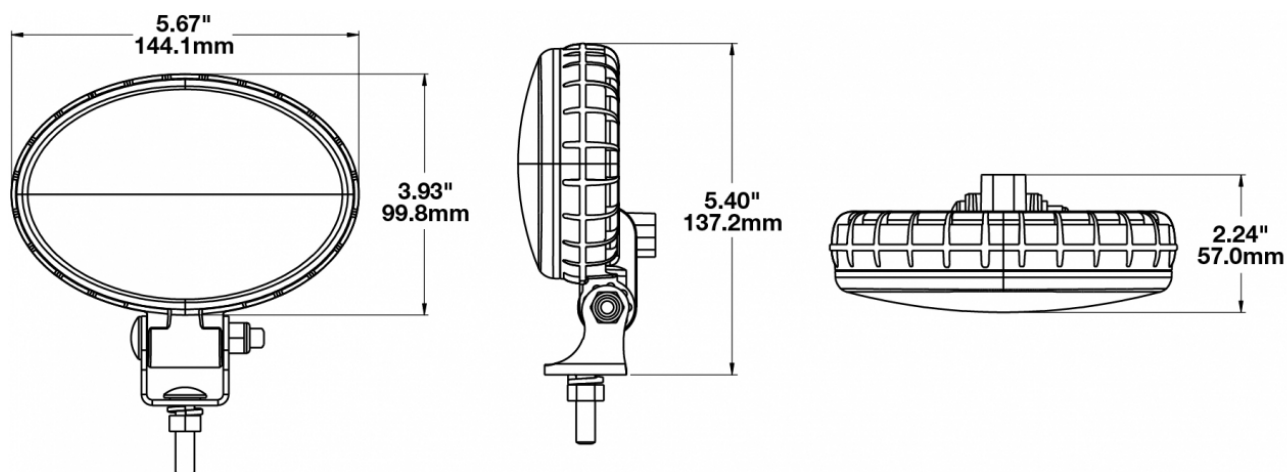

Print date: 2025-07-02

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER®
 Engineered. Lighting. Solutions.

LED Work Light - Model 774 XD

ELECTRICAL SPECIFICATIONS

Input Voltage	12-48V DC
Operating Voltage	9-60V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
Black Wire	Ground
White Wire	Work Light
Red Wire	Park
Yellow Wire	Turn
Current Draw	.77A @ 12V DC (Work) .40A @ 24V DC (Work) .26A @ 36V DC (Work) .20A @ 48V DC (Work) .45A @ 12V DC (Turn) .24A @ 24V DC (Turn) .17A @ 36V DC (Turn) .14A @ 48V DC (Turn)

REGULATORY STANDARDS COMPLIANCE




Buy America Standards

Eco Friendly

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	660
Effective Lumen Output	440
Beam Pattern(s)	Signalization - Turn (Front)

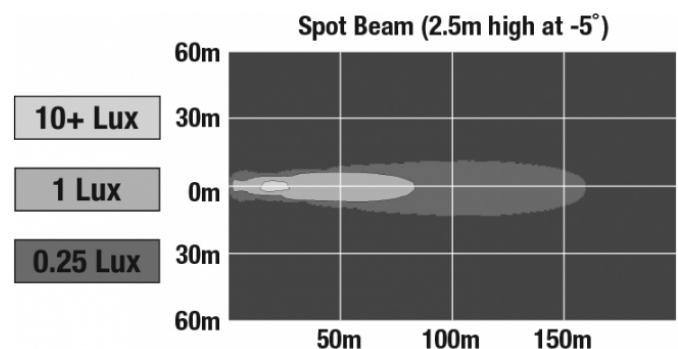

Print date: 2025-07-02

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Work Light - Model 774 XD

APPLICATIONS



PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

Print date: 2025-07-02

© 2025 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER®
Engineered. Lighting. Solutions.