LED Work Light - Model 783 XD

PRODUCT INFORMATION

Description 12-48V LED Work Light with Vertical

Flood Beam Pattern & No Mounting

Bracket - Bulk Qty (18 MIN)

 Height
 54.10 mm / 2.13 in

 Width
 169.67 mm / 6.68 in

 Depth
 45.21 mm / 1.78 in

Shape Rectangle
Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black

Minimum Operating $-40 \, ^{\circ}\text{C} \, / \, -40 \, ^{\circ}\text{F}$

Temperature


Maximum Operating $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$


Temperature

Connector or WiringIntegral DT04-2PMating ConnectorDeutsch DT06-2SProduct Weight0.35 lbs / 0.16 kgsShipping Weight6.95 lbs / 3.15 kgs



PRODUCT DIMENSIONS

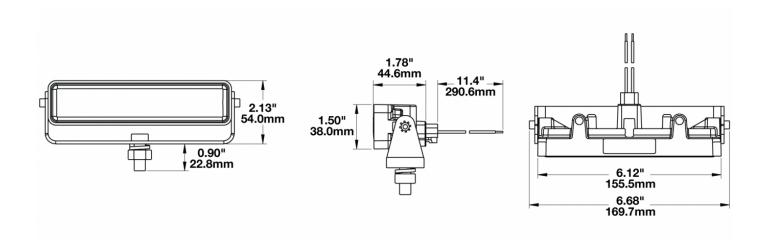



LED Work Light - Model 783 XD

ELECTRICAL SPECIFICATIONS

Input Voltage12-48V DCOperating Voltage9-60V DC

Transient Spike Protection 330V Peak @ 1 HZ-100 Pulses

Red Wire Positive Black Wire Negative

Current Draw 1.00A @ 12V DC (Flood)

0.50A @ 24V DC (Flood) 0.30A @ 36V DC (Flood) 0.25A @ 48V DC (Flood)

REGULATORY STANDARDS COMPLIANCE







Buy America Standards Eco Friendly
IEC IP67 UL Recognized

PHOTOMETRIC SPECIFICATIONS


Raw Lumen Output 675 **Effective Lumen** 485

Output

Candela Output 1,409 **Nominal LED Color** 5000 K

Temperature

Beam Pattern(s) Forward Lighting - Flood (Vertical)

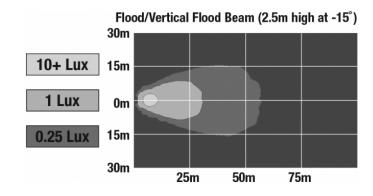



LED Work Light - Model 783 XD

APPLICATIONS























PRODUCT WARNINGS


For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

RELATED PRODUCTS







Part Number

1603451 with Vertical Flood Beam Pattern & Mounting Bracket

