PRODUCT INFORMATION

Description 12-48V LED Work Light with Vertical

Flood Beam Pattern & No Mounting

Bracket - Bulk Qty (18 MIN)

Height 54.10 mm / 2.13 in Width 169.67 mm / 6.68 in 45.21 mm / 1.78 in **Depth**

Shape Rectangle **Outer Lens Material** Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black

Minimum Operating -40 °C / -40 °F

Temperature


Maximum Operating 65 °C / 149 °F

Temperature

Integral DT04-2P **Connector or Wiring Mating Connector** Deutsch DT06-2S **Product Weight** 0.35 lbs / 0.16 kgs



PRODUCT DIMENSIONS

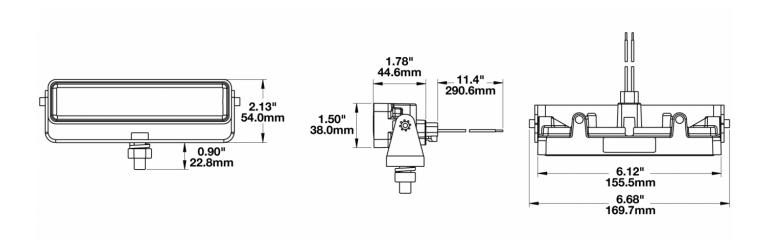



ELECTRICAL SPECIFICATIONS

Input Voltage12-48V DCOperating Voltage9-60V DC

Transient Spike Protection 330V Peak @ 1 HZ-100 Pulses

Red Wire Positive Black Wire Negative

Current Draw 1.00A @ 12V DC (Flood) 0.50A @ 24V DC (Flood)

0.30A @ 36V DC (Flood) 0.25A @ 48V DC (Flood)

REGULATORY STANDARDS COMPLIANCE





Buy America Standards IEC IP67 Eco Friendly
UL Recognized

PHOTOMETRIC SPECIFICATIONS


Raw Lumen Output 675 Effective Lumen 485


Output

Candela Output 1,409 **Nominal LED Color** 5000 K

Temperature

Beam Pattern(s) Forward Lighting - Flood (Vertical)

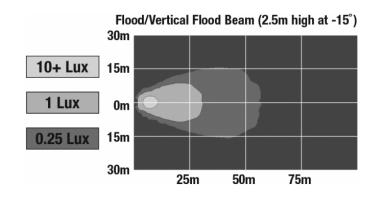



APPLICATIONS



















RELATED PRODUCTS



Part Number 1603391

12-48V LED Work Light with Flood Beam Pattern & Mounting Bracket



Part Number 1603392

12-48V LED Work Light with Flood Beam Pattern & Mounting Bracket - Bulk Qty (18 MIN)



<u>Part Number</u> 1603432

12-48V LED Work Light with Vertical Flood Beam Pattern & Mounting Bracket -Bulk Qty (18 MIN)



<u>Part Number</u> 1603451

12-48V LED Work Light with Vertical Flood Beam Pattern & Mounting Bracket



Part Number 1603462

12-48V LED Work Light with Flood Beam Pattern & No Mounting Bracket - Bulk Qty (18 MIN)



<u>Part Number</u> <u>1603472</u>

12-48V LED Work Light with Flood Beam Pattern & No Mounting Bracket or Wire Harness - Bulk (18 MIN)

