PRODUCT INFORMATION

Description 24V LED Work Light with Narrow Flood

Beam Pattern

 Height
 177.55 mm / 6.99 in

 Width
 253.75 mm / 9.99 in

 Depth
 88.90 mm / 3.5 in

 Shape
 Rectangular

Outer Lens MaterialGlassOuter Lens ColorClear

Housing Material Die-Cast Aluminum

Housing Color Black

Mounting Hardware Mounting Bolt

Description

Mounting Type Universal Pedestal Mount

Minimum Operating $-40 \, ^{\circ}\text{C} \, / \, -40 \, ^{\circ}\text{F}$

Temperature

Maximum Operating $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$

Temperature

Connector or Wiring Integrated 2-Pin Deutsch Weather-Proof

Socket (DT04-2P)


Mating ConnectorDeutsch DT06-2SProduct Weight6.72 lbs / 3.05 kgsShipping Weight7.50 lbs / 3.4 kgs

Additional Information Wire Harness: JWS part number


3267891.







PRODUCT DIMENSIONS

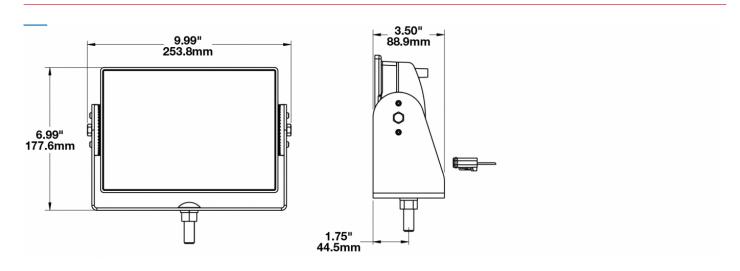

ELECTRICAL SPECIFICATIONS

Input Voltage24V DCOperating Voltage16-32V DC

Transient Spike Protection 330V Peak @ 1 HZ-100 Pulses

Current Draw 3.60A @ 24V DC

REGULATORY STANDARDS COMPLIANCE







Buy America Standards IEC IP67

Eco Friendly



PHOTOMETRIC SPECIFICATIONS


Raw Lumen Output 8,100 **Effective Lumen** 3,900

Output

5000 K **Nominal LED Color**

Temperature

Beam Pattern(s) Forward Lighting - Flood (Narrow)

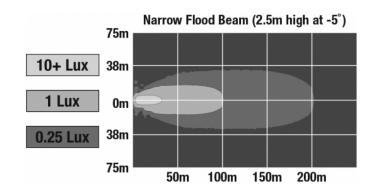

APPLICATIONS



















PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.



RELATED PRODUCTS



Part Number 0551431 with Medium Flood Beam Pattern



Part Number 0551451 12-24V LED Work Light 12-24V LED Work Light 24V LED with Wide with Wide Flood Beam Flood Beam Pattern Pattern



Part Number 0557931