### **PRODUCT INFORMATION**

Description
Height
Width
Depth
Shape
<b>Outer Lens Material</b>
Outer Lens Color
Housing Material
Housing Color
Mounting Type
Minimum Operating Temperature
Maximum Operating Temperature
Connector or Wiring
Mating Connector
Product Weight
Shipping Weight

12-24V LED Work Light with Wide Flood Beam Pattern 155.70 mm / 6.13 in 220.98 mm / 8.7 in 66.04 mm / 2.6 in Rectangular Glass Clear Die-Cast Aluminum Black Flush Mount -40 °C / -40 °F


Integrated 2-Pin Deutsch Weather-Proof Socket (DT04-2P) 2-Pin Deutsch Weather-Proof Plug (DT06-2S) 4.10 lbs / 1.86 kgs 4.68 lbs / 2.12 kgs







## **PRODUCT DIMENSIONS**

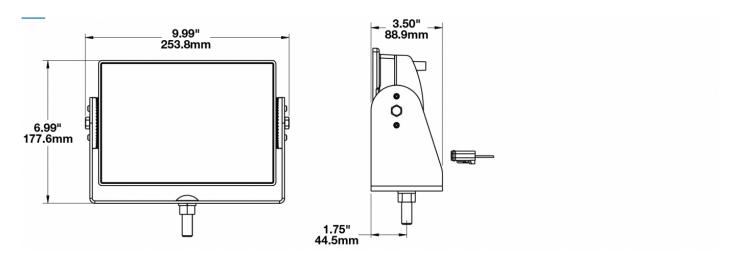

### **ELECTRICAL SPECIFICATIONS**

Input Voltage	12-24V DC
Red Wire	Positive
Black Wire	Negative
Current Draw	6.7A @ 12V DC 3.7A @ 24V DC

#### **REGULATORY STANDARDS COMPLIANCE**




Buy America Standards IEC IP67 Eco Friendly





### **PHOTOMETRIC SPECIFICATIONS**

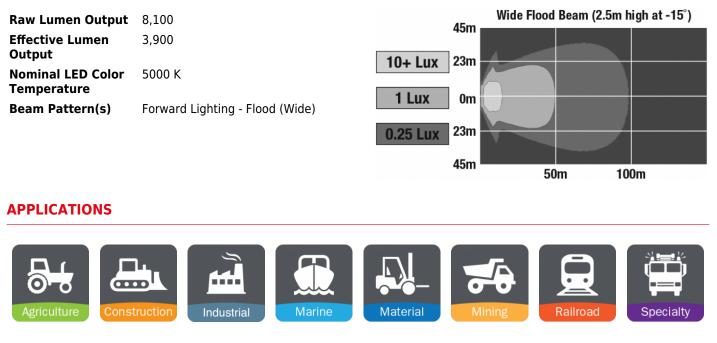

## **PRODUCT WARNINGS**

For California residents:

**WARNING:** Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - <u>www.P65Warnings.ca.gov</u>.



#### **RELATED PRODUCTS**



**Part Number** 0549631 with Wide Flood Beam Pattern & Yellow Housing



**Part Number** 0549641 12-24V LED Work Light with Narrow Flood Beam Pattern & Yellow Beam Pattern Housing



**Part Number** 0551431 with Medium Flood



**Part Number** 0551441 with Narrow Flood Beam Pattern



**Part Number** 0551451 with Wide Flood Beam Pattern



Part Number 0557911 24V LED Work Light with Narrow Flood Beam Pattern



Part Number 0557921 24V LED Work Light with Medium Flood Beam Pattern



Part Number 0557931 24V LED with Wide Flood Beam Pattern

