

# LED Work Light - Model 526

## PRODUCT INFORMATION

<b>Description</b>	24V LED Work Light with Black Housing, Polycarbonate Lens & Flood Beam Pattern
<b>Height</b>	160.02 mm / 6.3 in
<b>Width</b>	157.48 mm / 6.2 in
<b>Depth</b>	96.52 mm / 3.8 in
<b>Shape</b>	Square
<b>Outer Lens Material</b>	Polycarbonate
<b>Outer Lens Color</b>	Clear
<b>Housing Material</b>	Die-Cast Aluminum
<b>Housing Color</b>	Black
<b>Mounting Hardware Description</b>	(x1) M10-1.5 x 25 Mounting Bolt
<b>Mounting Type</b>	Universal Pedestal Mount
<b>Minimum Operating Temperature</b>	-40 °C / -40 °F
<b>Maximum Operating Temperature</b>	65 °C / 149 °F
<b>Connector or Wiring</b>	iCONN Connector - iMATE23
<b>Product Weight</b>	4.60 lbs / 2.09 kgs
<b>Shipping Weight</b>	5.00 lbs / 2.27 kgs
<b>Additional Information</b>	Wire Harness: JWS part number 3271781.




**Print date: 2026-06-24**

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
 www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**   
 Engineered. Lighting. Solutions.

# LED Work Light - Model 526

## PRODUCT DIMENSIONS

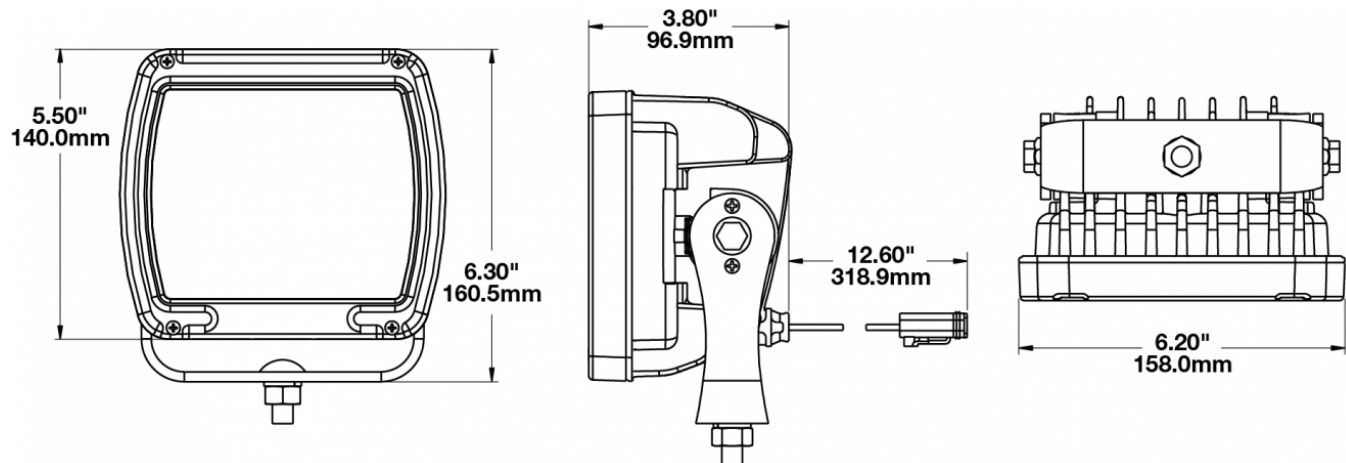

## ELECTRICAL SPECIFICATIONS

<b>Input Voltage</b>	24V DC
<b>Operating Voltage</b>	16-32V DC
<b>Transient Spike Protection</b>	330V Peak @ 1 HZ-100 Pulses
<b>Current Draw</b>	5.00A @ 24V DC

## REGULATORY STANDARDS COMPLIANCE



IEC IP69K

Print date: 2026-06-24


© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
[www.jwspeaker.com](http://www.jwspeaker.com) • [speaker@jwspeaker.com](mailto:speaker@jwspeaker.com) • 262.251.6660

**J.W. SPEAKER**  
 Engineered. Lighting. Solutions.

# LED Work Light - Model 526

## PHOTOMETRIC SPECIFICATIONS

<b>Raw Lumen Output</b>	9,000
<b>Effective Lumen Output</b>	5800
<b>Nominal LED Color Temperature</b>	5700 K
<b>Beam Pattern(s)</b>	Forward Lighting - Flood (Standard)

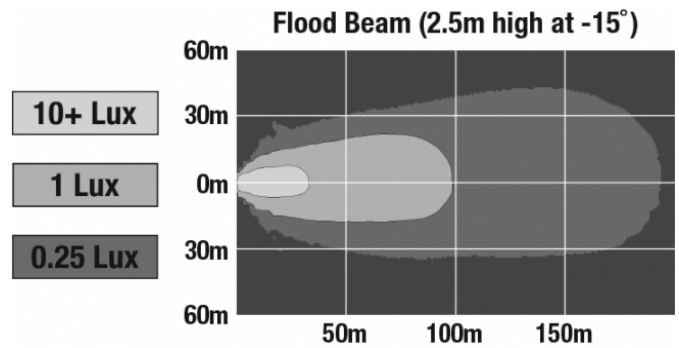

## APPLICATIONS



## PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Print date: 2026-06-24

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
[www.jwspeaker.com](http://www.jwspeaker.com) • [speaker@jwspeaker.com](mailto:speaker@jwspeaker.com) • 262.251.6660

**J.W. SPEAKER**  
 Engineered. Lighting. Solutions.

# LED Work Light - Model 526

## ACCESSORIES

---



**Part Number**  
**3267541**

12" 18AWG iCONN  
iMATE 23 Wire Asm  
w/DT04-2P



**Part Number**  
**3268191**

15M 18AWG iCONN  
iMATE 23 Wire Asm  
w/DT04-2P



**Part Number**  
**3268201**

2.5M 18AWG iCONN  
iMATE 23 Wire Asm  
w/DT04-2P

# LED Work Light - Model 526

## RELATED PRODUCTS

---



**Part Number**  
**1300571**

24V LED Work Light with Yellow Housing, Polycarbonate Lens & Dual White Anti-Glare Pattern



**Part Number**  
**1300591**

24V LED Work Light with Black Housing, Polycarbonate Lens & Trapezoid Beam Pattern



**Part Number**  
**1300601**

24V Anti-Glare Beam Pattern w/ Polycarbonate Lens



**Part Number**  
**1300641**

24V LED Work Light with Black Housing, Polycarbonate Lens & Dual White Anti-Glare Pattern



**Part Number**  
**1300711**

24V LED Work Light with Black Housing, Polycarbonate Lens & Spot Beam Pattern



**Part Number**  
**1300721**

12V LED Work Light with Black Housing, Polycarbonate Lens & Flood Beam Pattern



**Part Number**  
**1300741**

12V LED Work Light with Black Housing, Polycarbonate Lens & Anti-Glare Pattern



**Part Number**  
**1300751**

12V LED Work Light with Yellow Housing, Polycarbonate Lens & Dual White Anti-Glare Pattern