

LED Work Light - Model 526

PRODUCT INFORMATION

| | |
|--------------------------------------|---|
| Description | 24V LED Work Light with Black Housing, Polycarbonate Lens & Dual White Anti-Glare Pattern |
| Height | 160.47 mm / 6.32 in |
| Width | 158.00 mm / 6.22 in |
| Depth | 98.00 mm / 3.86 in |
| Shape | Square |
| Outer Lens Material | Polycarbonate |
| Outer Lens Color | Clear |
| Housing Material | Die-Cast Aluminum |
| Housing Color | Black |
| Mounting Hardware Description | (x1) M10-1.5 x 40mm Mounting Bolt |
| Mounting Type | Universal Pedestal Mount |
| Minimum Operating Temperature | -40 °C / -40 °F |
| Maximum Operating Temperature | 65 °C / 149 °F |
| Connector or Wiring | iCONN connector - IMate23 3 wire |
| Product Weight | 4.60 lbs / 2.09 kgs |
| Shipping Weight | 4.88 lbs / 2.21 kgs |
| Additional Information | Warm/Cool White Color Temperatures: Warm White: 2800K Cool White: 5000K |




Print date: 2026-06-24

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
Engineered. Lighting. Solutions.

LED Work Light - Model 526

PRODUCT DIMENSIONS

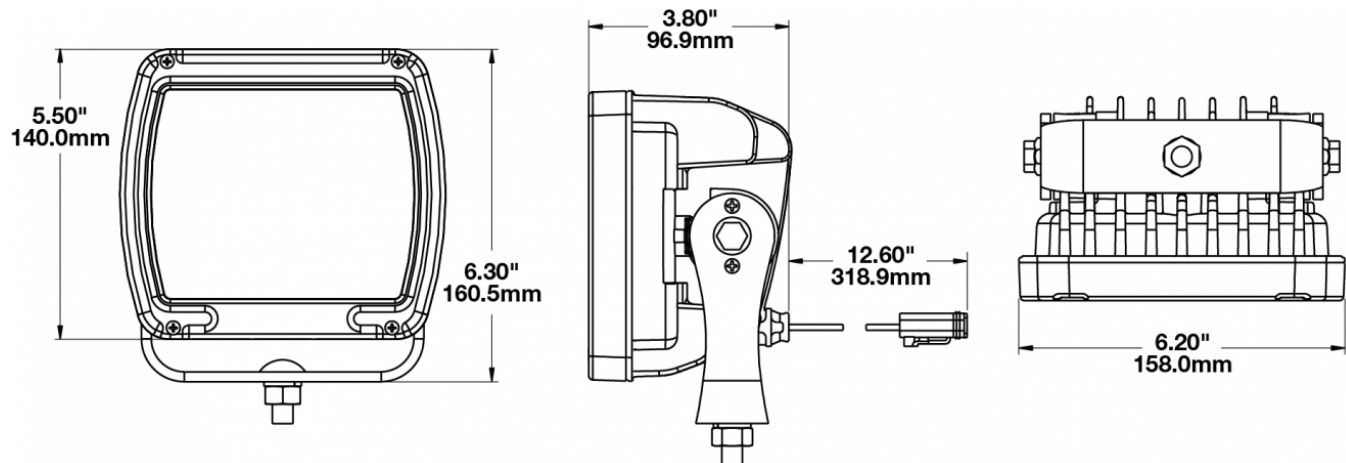

ELECTRICAL SPECIFICATIONS

| | |
|-----------------------------------|--|
| Input Voltage | 24V DC |
| Operating Voltage | 16-32V DC |
| Transient Spike Protection | 330V Peak @ 1 HZ-100 Pulses |
| White Wire | Cool White |
| Black Wire | Ground |
| Green Wire | Warm White |
| Current Draw | 3.25A @ 24V DC (Warm White) 3.25A @ 24V DC (Cool White) |

REGULATORY STANDARDS COMPLIANCE



IEC IP69K

Print date: 2026-06-24

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
Engineered. Lighting. Solutions.

LED Work Light - Model 526

PHOTOMETRIC SPECIFICATIONS

| | |
|-------------------------------|------------------------------|
| Raw Lumen Output | (warm) 7500, (cool) 9900 |
| Effective Lumen Output | (warm) 3390, (cool) 3464 |
| Candela Output | (warm) 4508, (cool) 4488 |
| Beam Pattern(s) | Forward Lighting - Dual Beam |

APPLICATIONS



PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

ACCESSORIES



Part Number
3267541
12" 18AWG iCONN
iMATE 23 Wire Asm
w/DT04-2P



Part Number
3268191
15M 18AWG iCONN
iMATE 23 Wire Asm
w/DT04-2P



Part Number
3268201
2.5M 18AWG iCONN
iMATE 23 Wire Asm
w/DT04-2P

Print date: 2026-06-24

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
Engineered. Lighting. Solutions.

LED Work Light - Model 526

RELATED PRODUCTS



Part Number
1300571

24V LED Work Light with Yellow Housing, Polycarbonate Lens & Dual White Anti-Glare Pattern



Part Number
1300581

24V LED Work Light with Black Housing, Polycarbonate Lens & Flood Beam Pattern



Part Number
1300591

24V LED Work Light with Black Housing, Polycarbonate Lens & Trapezoid Beam Pattern



Part Number
1300601

24V Anti-Glare Beam Pattern w/ Polycarbonate Lens



Part Number
1300711

24V LED Work Light with Black Housing, Polycarbonate Lens & Spot Beam Pattern



Part Number
1300721

12V LED Work Light with Black Housing, Polycarbonate Lens & Flood Beam Pattern



Part Number
1300741

12V LED Work Light with Black Housing, Polycarbonate Lens & Anti-Glare Pattern



Part Number
1300751

12V LED Work Light with Yellow Housing, Polycarbonate Lens & Dual White Anti-Glare Pattern