


# LED Work Light - Model 526

## PRODUCT INFORMATION

|                                      |  |
|--------------------------------------|--|
| <b>Description</b>                   | 12V LED Work Light with Black Housing, Polycarbonate Lens & Anti-Glare Pattern |
| <b>Height</b>                        | 140.00 mm / 5.51 in  |
| <b>Width</b>                         | 158.00 mm / 6.22 in  |
| <b>Depth</b>                         | 98.00 mm / 3.86 in   |
| <b>Shape</b>                         | Rectangular  |
| <b>Outer Lens Material</b>           | Polycarbonate  |
| <b>Outer Lens Color</b>              | Clear  |
| <b>Housing Material</b>              | Die-Cast Aluminium   |
| <b>Housing Color</b>                 | Black  |
| <b>Mounting Hardware Description</b> | (x1) M10-1.5 x 25mm Universal Pedestal Mount                                   |
| <b>Minimum Operating Temperature</b> | -40 °C / -40 °F  |
| <b>Maximum Operating Temperature</b> | 65 °C / 149 °F   |
| <b>Connector or Wiring</b>           | iCONN Connector - iMATE23  |
| <b>Product Weight</b>                | 4.60 lbs / 2.09 kgs  |
| <b>Shipping Weight</b>               | 4.88 lbs / 2.21 kgs  |



## PRODUCT DIMENSIONS

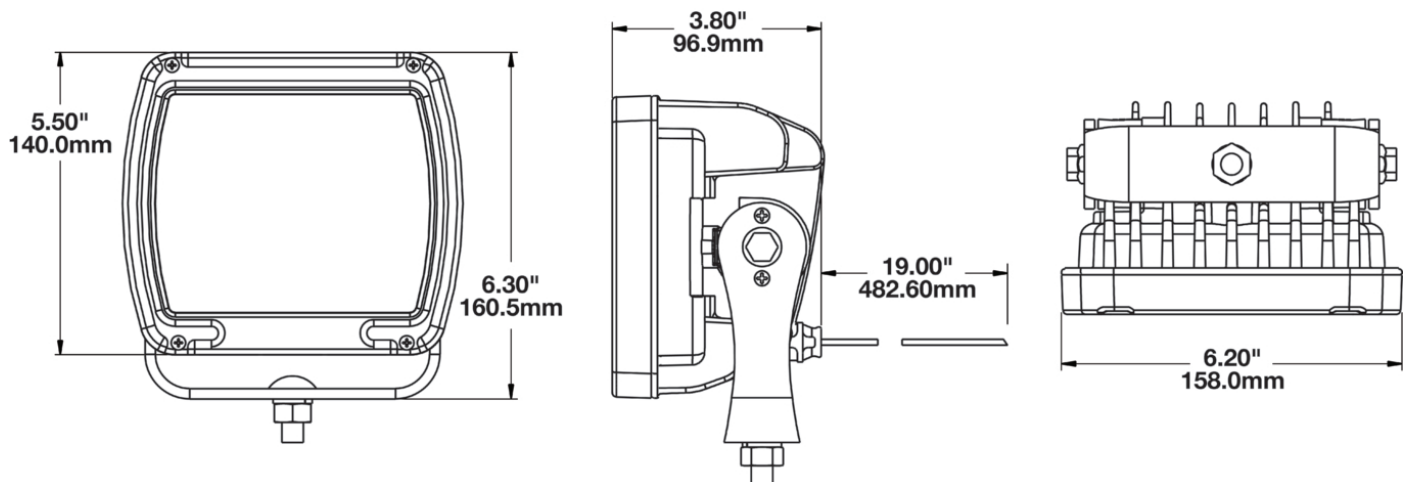

Print date: 2026-05-13

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
[www.jwspeaker.com](http://www.jwspeaker.com) • [speaker@jwspeaker.com](mailto:speaker@jwspeaker.com) • 262.251.6660

**J.W. SPEAKER**  
 Engineered. Lighting. Solutions.

# LED Work Light - Model 526

## ELECTRICAL SPECIFICATIONS

|                          |               |
|--------------------------|---------------|
| <b>Input Voltage</b>     | 9-16V DC      |
| <b>Operating Voltage</b> | 121V DC       |
| <b>White Wire Wire</b>   | Power         |
| <b>Black Wire Wire</b>   | Ground        |
| <b>Current Draw</b>      | 5.4A @ 12V DC |


## REGULATORY STANDARDS COMPLIANCE



IEC IP69K

## PHOTOMETRIC SPECIFICATIONS

|                               |            |
|-------------------------------|------------|
| <b>Raw Lumen Output</b>       | 8600       |
| <b>Effective Lumen Output</b> | 5000       |
| <b>Candela Output</b>         | 6000       |
| <b>Beam Pattern(s)</b>        | Anti-Glare |

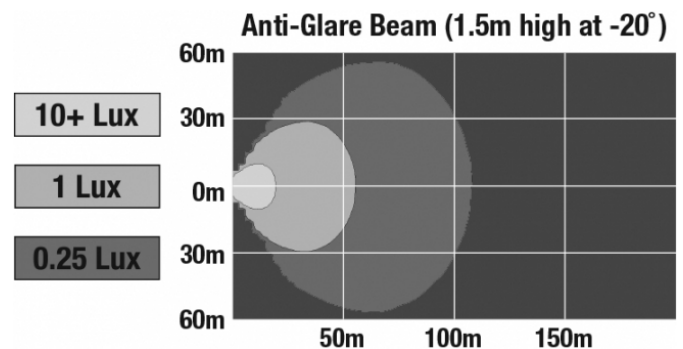

## PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Print date: 2026-05-13

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
[www.jwspeaker.com](http://www.jwspeaker.com) • [speaker@jwspeaker.com](mailto:speaker@jwspeaker.com) • 262.251.6660

**J.W. SPEAKER**  
 Engineered. Lighting. Solutions.

# LED Work Light - Model 526

## ACCESSORIES

---



**Part Number**  
**3267541**

12" 18AWG iCONN  
iMATE 23 Wire Asm  
w/DT04-2P



**Part Number**  
**3268191**

15M 18AWG iCONN  
iMATE 23 Wire Asm  
w/DT04-2P



**Part Number**  
**3268201**

2.5M 18AWG iCONN  
iMATE 23 Wire Asm  
w/DT04-2P

# LED Work Light - Model 526

## RELATED PRODUCTS

---



**Part Number**  
**1300571**

24V LED Work Light with Yellow Housing, Polycarbonate Lens & Dual White Anti-Glare Pattern



**Part Number**  
**1300581**

24V LED Work Light with Black Housing, Polycarbonate Lens & Flood Beam Pattern



**Part Number**  
**1300591**

24V LED Work Light with Black Housing, Polycarbonate Lens & Trapezoid Beam Pattern



**Part Number**  
**1300601**

24V Anti-Glare Beam Pattern w/ Polycarbonate Lens



**Part Number**  
**1300641**

24V LED Work Light with Black Housing, Polycarbonate Lens & Dual White Anti-Glare Pattern



**Part Number**  
**1300711**

24V LED Work Light with Black Housing, Polycarbonate Lens & Spot Beam Pattern



**Part Number**  
**1300721**

12V LED Work Light with Black Housing, Polycarbonate Lens & Flood Beam Pattern



**Part Number**  
**1300751**

12V LED Work Light with Yellow Housing, Polycarbonate Lens & Dual White Anti-Glare Pattern