LED Work Lights - Model 660

PRODUCT INFORMATION

Description 12-24V LED Work Light with Flood Beam

Pattern & Pedestal Mount

 Height
 121.92 mm / 4.8 in

 Width
 169.93 mm / 6.69 in

 Depth
 81.53 mm / 3.21 in

ShapeOvalOuter Lens MaterialGlassOuter Lens ColorClear

Housing Material Die-Cast Aluminum

Housing Color Black

Mounting Hardware (x1) M8-1.25 x 20mm Mounting Bolt

Description

Mounting Type Universal Pedestal Mount

Minimum Operating $-40 \, ^{\circ}\text{C} \, / \, -40 \, ^{\circ}\text{F}$

Temperature


Maximum Operating $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$

Temperature

Mating ConnectorPackard (#12059183)Product Weight1.53 lbs / 0.69 kgsShipping Weight2.69 lbs / 1.22 kgs



PRODUCT DIMENSIONS

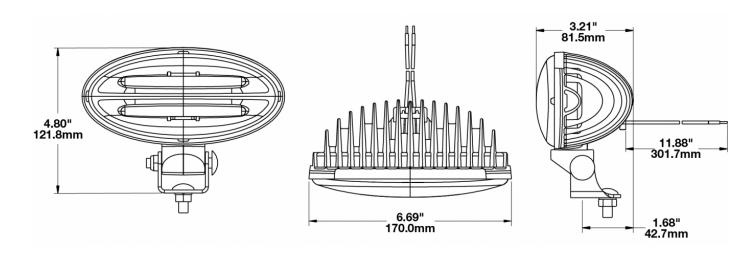

Print date: 2025-12-01

LED Work Lights - Model 660

ELECTRICAL SPECIFICATIONS

Input Voltage12-24V DCOperating Voltage9-28V DC

Transient Spike Protection 150V Peak @ 1 HZ-100 Pulses

Red WirePositiveBlack WireNegativeCurrent Draw2.0A @ 12V DC

1.0A @ 24V DC

REGULATORY STANDARDS COMPLIANCE







Buy America Standards

Eco Friendly

IEC IP69K

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 2,750 **Effective Lumen** 2,200


Output

Nominal LED Color 5000 K

Temperature

Beam Pattern(s) Forward Lighting - Flood

(Standard)

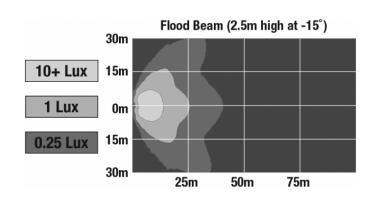



LED Work Lights - Model 660

APPLICATIONS















PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

RELATED PRODUCTS



Part Number 0548521 12-24V LED Work Light with Flood Beam Pattern & Panel Mount

