PRODUCT INFORMATION

Description 12V LED Work Light with Flood Beam

Pattern & DT04-2P Connector

 Height
 137.16 mm / 5.4 in

 Width
 144.02 mm / 5.67 in

 Depth
 56.90 mm / 2.24 in

Shape Oval

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Polycarbonate

Housing Color Black

Mounting Hardware (x1) 5/16"-18 x 1.25" Mounting Bolt

Description

Mounting Type Universal Pedestal Mount

Minimum Operating $-40 \, ^{\circ}\text{C} \, / \, -40 \, ^{\circ}\text{F}$

Temperature

Maximum Operating $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$

Temperature

Connector or Wiring Integrated 2-Pin Deutsch Weather-Proof

Socket (DT04-2P)

Mating Connector 2-Pin Deutsch Weather-Proof Plug


(DT06-2S)

Product Weight 0.86 lbs / 0.39 kgs Shipping Weight 15.00 lbs / 6.8 kgs





PRODUCT DIMENSIONS

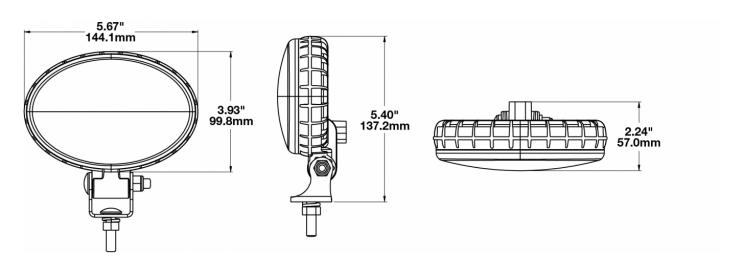

ELECTRICAL SPECIFICATIONS

Input Voltage12V DCOperating Voltage10-15V DC

Transient Spike Protection 330V Peak @ 1 HZ-100 Pulses

Red WirePositiveBlack WireNegativeCurrent Draw1A @ 12V DC

REGULATORY STANDARDS COMPLIANCE









Buy America Standards CISPR 12
CISPR 22 Eco Friendly
IEC IP67 SAE J1113-13

Print date: 2025-07-19

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 900 **Effective Lumen** 700

Output


Nominal LED Color

Temperature

Beam Pattern(s) Forward Lighting - Flood

(Standard)

5000 K

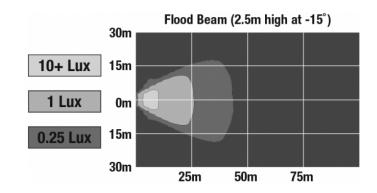

APPLICATIONS



















PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.



RELATED PRODUCTS



Part Number 1706051 12V LED Work Light with Trapezoid Beam Pattern & DT04-2P Connector



Part Number 1706241 with Flood Beam Pattern & DT04-2P Connector



Part Number 1706251 with Trapezoid Beam Pattern & DT04-2P Connector



Part Number 1706261 with Spot Beam Pattern & DT04-2P Connector



Part Number 1706461 12-48V LED Work Light 12-48V LED Work Light 12-48V LED Work Light 12-48V LED Work Light with Flood Beam Pattern & PE12015792 Connector

