
PART NUMBER 0553841

LED Work Light - Model 803


PRODUCT INFORMATION

Description	12-48V LED Work Light with Flood Beam Pattern
Height	78.23 mm / 3.08 in
Width	123.95 mm / 4.88 in
Depth	39.12 mm / 1.54 in
Shape	Rectangular
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Polycarbonate
Housing Color	Clear
Bezel Color	Black
Mounting Type	Low Profile Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	.25 Male Blade Term
Mating Connector	.25 Female Blade Term
Product Weight	0.30 lbs / 0.14 kgs
Shipping Weight	2.34 lbs / 1.06 kgs

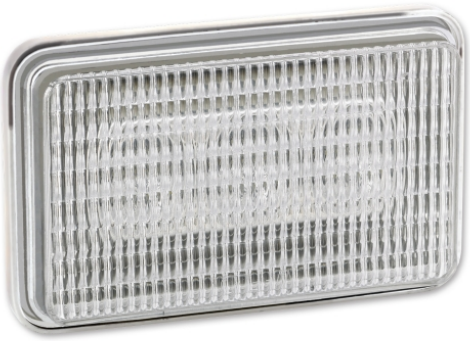

MODEL 803

PRODUCT DIMENSIONS

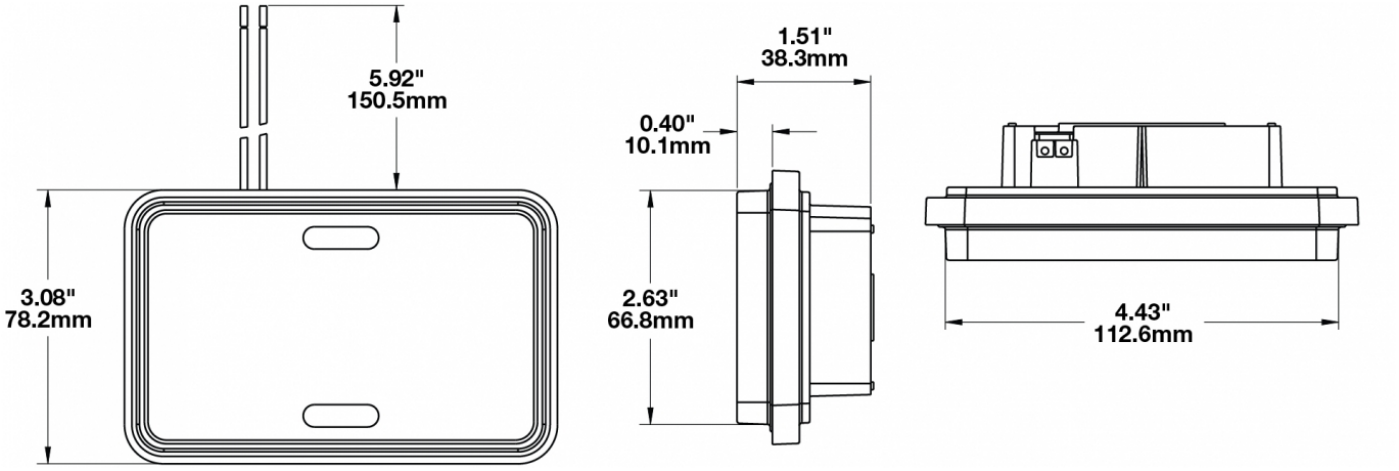

Print date: 2026-11-06

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.

www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER® Engineered. Lighting. Solutions.

PART NUMBER 0553841

LED Work Light - Model 803

ELECTRICAL SPECIFICATIONS

Input Voltage	12-48V DC
Operating Voltage	10-60V DC
Transient Spike Protection	150V Peak @ 1 HZ-100 Pulses
Black Wire	Ground
Current Draw	.00042A @ 12V DC .00021A @ 24V DC .00014A @ 36V DC .00011A @ 48V DC


REGULATORY STANDARDS COMPLIANCE



Buy America Standards
IEC IP67
Eco Friendly
UL Recognized

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output	495
Effective Lumen Output	294
Nominal LED Color Temperature	5000 K

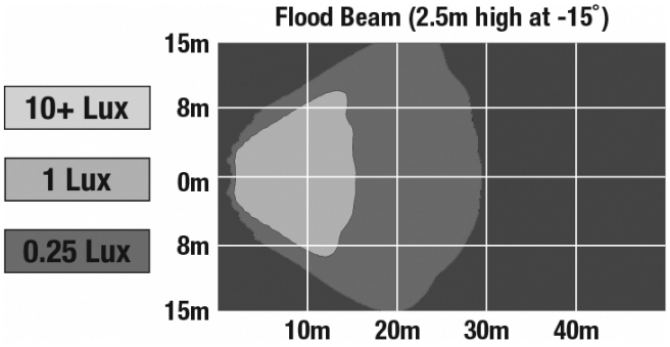

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
Engineered. Lighting. Solutions.

PART NUMBER 0553841

LED Work Light - Model 803

APPLICATIONS



PRODUCT WARNINGS

For California residents:
⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.
⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER® Engineered. Lighting. Solutions.