

LED Work Light - Model 806

PRODUCT INFORMATION

Description	12V LED Work Light with Flood Beam Pattern & Combine Retrofit Mount
Height	115.82 mm / 4.56 in
Width	184.91 mm / 7.28 in
Depth	60.96 mm / 2.4 in
Shape	Rectangular
Outer Lens Material	Glass
Outer Lens Color	Clear
Housing Material	Die-Cast Aluminum
Housing Color	Black
Mounting Type	Combine Retrofit Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Mating Connector	Packard (#12020599)
Product Weight	1.95 lbs / 0.88 kgs
Shipping Weight	2.60 lbs / 1.18 kgs



ELECTRICAL SPECIFICATIONS

Input Voltage	12V DC
Operating Voltage	9-16V DC
Transient Spike Protection	150V Peak @ 1 HZ-100 Pulses
Black Wire	Negative
Current Draw	1.5A @ 12V DC

Print date: 2026-01-20

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Work Light - Model 806

REGULATORY STANDARDS COMPLIANCE



Buy America Standards

IEC IP67

Tested to ECE Reg. 10
(Radiated Emissions only)

Eco Friendly


SAE J1113-21

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 1,100

Effective Lumen Output 900

Nominal LED Color Temperature 5000 K

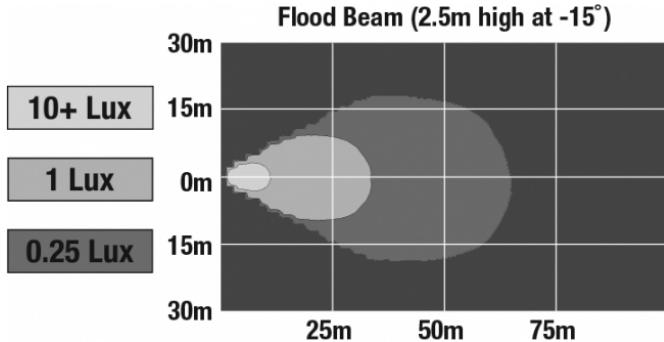Beam Pattern(s) Forward Lighting - Flood
(Standard)

APPLICATIONS



Agriculture



Construction



Industrial




Material



Mining



Railroad



Specialty



Truck & Bus

PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - www.P65Warnings.ca.gov.⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

Print date: 2026-01-20

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660