LED Work Light - Model 806

PRODUCT INFORMATION

Description 12V LED Work Light with Flood Beam

Pattern & Combine Retrofit Mount

 Height
 115.82 mm / 4.56 in

 Width
 184.91 mm / 7.28 in

 Depth
 60.96 mm / 2.4 in

 Shape
 Rectangular

Outer Lens MaterialGlassOuter Lens ColorClear

Housing Material Die-Cast Aluminum

Housing Color Black

Mounting Type Combine Retrofit Mount

Minimum Operating -40 °C / -40 °F

Temperature

Maximum Operating $65 \, ^{\circ}\text{C} \, / \, 149 \, ^{\circ}\text{F}$

Temperature

Mating ConnectorPackard (#12020599)Product Weight1.95 lbs / 0.88 kgsShipping Weight2.60 lbs / 1.18 kgs




ELECTRICAL SPECIFICATIONS

Input Voltage 12V DC **Operating Voltage** 9-16V DC

Transient Spike Protection 150V Peak @ 1 HZ-100 Pulses

Black Wire Negative
Current Draw 1.5A @ 12V DC



LED Work Light - Model 806

REGULATORY STANDARDS COMPLIANCE









Buy America Standards IEC IP67

Tested to ECE Reg. 10 (Radiated Emissions only)

Eco Friendly SAE J1113-21

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 1,100 Effective Lumen 900

Output

Nominal LED Color 50


Temperature

Beam Pattern(s)

5000 K

Forward Lighting - Flood

(Standard)

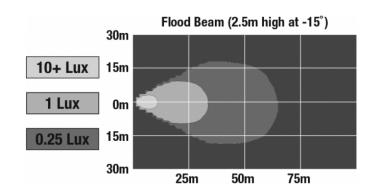

APPLICATIONS

















PRODUCT WARNINGS

For California residents:

▲ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

Print date: 2024-07-27



LED Work Light - Model 806

RELATED PRODUCTS



<u>Part Number</u> <u>0545971</u>

12V LED Work Light with Flood Beam Pattern & Bottom Mount



<u>Part Number</u> <u>0545981</u>

12V LED Work Light with Flood Beam Pattern & Side Mount

