

# LED Work Light - Model 806

## PRODUCT INFORMATION

---

<b>Description</b>	12V LED Work Light with Flood Beam Pattern & Combine Retrofit Mount
<b>Height</b>	115.82 mm / 4.56 in
<b>Width</b>	184.91 mm / 7.28 in
<b>Depth</b>	60.96 mm / 2.4 in
<b>Shape</b>	Rectangular
<b>Outer Lens Material</b>	Glass
<b>Outer Lens Color</b>	Clear
<b>Housing Material</b>	Die-Cast Aluminum
<b>Housing Color</b>	Black
<b>Mounting Type</b>	Combine Retrofit Mount
<b>Minimum Operating Temperature</b>	-40 °C / -40 °F
<b>Maximum Operating Temperature</b>	65 °C / 149 °F
<b>Mating Connector</b>	Packard (#12020599)
<b>Product Weight</b>	1.95 lbs / 0.88 kgs
<b>Shipping Weight</b>	2.60 lbs / 1.18 kgs



## ELECTRICAL SPECIFICATIONS

---

<b>Input Voltage</b>	12V DC
<b>Operating Voltage</b>	9-16V DC
<b>Transient Spike Protection</b>	150V Peak @ 1 HZ-100 Pulses
<b>Black Wire</b>	Negative
<b>Current Draw</b>	1.5A @ 12V DC

---

**Print date: 2026-06-09**

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# LED Work Light - Model 806

## REGULATORY STANDARDS COMPLIANCE



Buy America Standards

IEC IP67


Tested to ECE Reg. 10  
(Radiated Emissions only)

Eco Friendly


SAE J1113-21

## PHOTOMETRIC SPECIFICATIONS

<b>Raw Lumen Output</b>	1,100
<b>Effective Lumen Output</b>	900
<b>Nominal LED Color Temperature</b>	5000 K
<b>Beam Pattern(s)</b>	Forward Lighting - Flood (Standard)

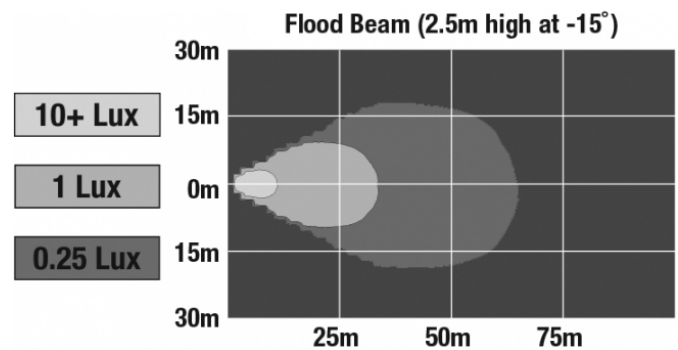

## APPLICATIONS

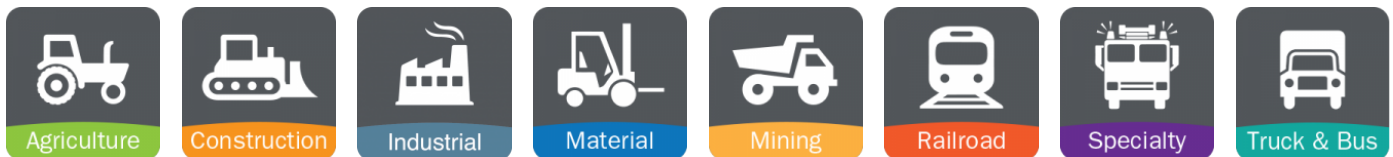

## PRODUCT WARNINGS

For California residents:

**⚠ WARNING:** Cancer and reproductive harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**⚠ AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

Print date: 2026-06-09

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**  
Engineered. Lighting. Solutions.