
PRODUCT INFORMATION

Description	12-24V LED Work Light with Spot Beam Pattern
Height	154.18 mm / 6.07 in
Width	113.28 mm / 4.46 in
Depth	54.10 mm / 2.13 in
Shape	Square
Outer Lens Material	Polycarbonate
Outer Lens Color	Clear
Housing Material	Polycarbonate
Housing Color	Black
Mounting Hardware Description	(x1) 5/16"-18 x 1.00" Mounting Bolt
Mounting Type	Universal Pedestal Mount
Minimum Operating Temperature	-40 °C / -40 °F
Maximum Operating Temperature	65 °C / 149 °F
Connector or Wiring	Integrated 2-Pin Deutsch Weather-Proof Socket (DT04-2P)
Mating Connector	2-Pin Deutsch Weather-Proof Plug (DT06-2S)
Product Weight	0.86 lbs / 0.39 kgs
Shipping Weight	1.46 lbs / 0.66 kgs





PRODUCT DIMENSIONS

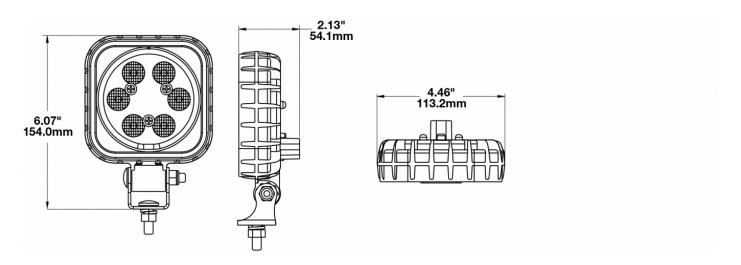

ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Operating Voltage	10-30V DC
Transient Spike Protection	330V Peak @ 1 HZ-100 Pulses
Red Wire	Positive
Black Wire	Negative
Current Draw	1.25A @ 12V DC 0.61A @ 24V DC

REGULATORY STANDARDS COMPLIANCE




CISPR 22 IEC IP69K UL Recognized CISPR 12 Eco Friendly SAE J1113-13





PHOTOMETRIC SPECIFICATIONS

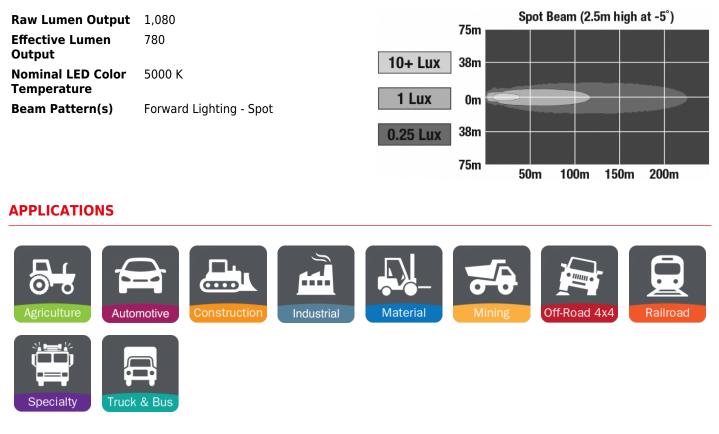

PRODUCT WARNINGS

For California residents:

- A WARNING: Cancer and reproductive harm <u>www.P65Warnings.ca.gov</u>.
- AVERTISSEMENT: Cancer et effet nocif sur la reproduction <u>www.P65Warnings.ca.gov</u>.



RELATED PRODUCTS



Part Number 1300001 with Flood Beam Pattern



Part Number 1300011 12-24V LED Work Light 12-24V LED Work Light 12-110V LED Work with Trapezoid Beam Pattern



Part Number 1300031 Light with Trapezoid Beam Pattern & Integrated 2-Pin Deutsch Connector



Part Number 1300041 12-110V LED Work Light with Trapezoid Beam Pattern & Integrated AMP Connector



Part Number 1300091 12-110V LED Work Light with Flood Beam Pattern



Part Number 1300101 12-110V LED Work Light with Spot Beam Pattern



Part Number 1300301 12-48V LED Work Light 12-48V LED Work Light with Left Hand Vertical Flood Beam Pattern



Part Number 1300311 with Right Hand Vertical Flood Beam Pattern



