LED Signal Lights – Military Blackout Lights

PRODUCT INFORMATION


Description	24V 60mm Red Rear Blackout Tail Light - Bulk Qty (18 MIN)	
Height	39.88 mm / 1.57 in	
Width	59.94 mm / 2.36 in	
Depth	45.72 mm / 1.8 in	
Shape	Round	19
Outer Lens Material	Polycarbonate	
Outer Lens Color	Clear	
Housing Material	Nylon	
Housing Color	Black	
Mounting Hardware Description	(x2) #6-Screw	
Mounting Type	Flange Mount	
Minimum Operating Temperature	-40 °C / -40 °F	
Maximum Operating Temperature	85 °C / 185 °F	
Connector or Wiring	Deutsch DT04-4P	
Mating Connector	Deutsch DT06-4S	
Product Weight	0.09 lbs / 0.04 kgs	
Shipping Weight	12.84 lbs / 5.82 kgs	
Additional Information	Light color is Red. Meets MIL- PRF-32212A Section 3.8.5.	





LED Signal Lights – Military Blackout Lights

PRODUCT DIMENSIONS

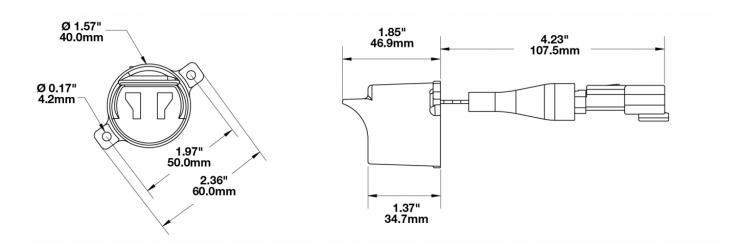

ELECTRICAL SPECIFICATIONS

Input Voltage	24V DC
Operating Voltage	18-32V DC
Black Wire	Ground
Red Wire	Positive
Current Draw	0.025A @ 24V DC

REGULATORY STANDARDS COMPLIANCE



IEC IP67

PHOTOMETRIC SPECIFICATIONS

Beam Pattern(s) Signalization - Tail

Print date: 2025-08-13 © 2025 J.W. Speaker Corporation • Germantown, WI U.S.A. www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660



LED Signal Lights – Military Blackout Lights

APPLICATIONS



PRODUCT WARNINGS

For California residents: ▲ WARNING: Cancer and reproductive harm - <u>www.P65Warnings.ca.gov</u>. ▲ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - <u>www.P65Warnings.ca.gov</u>.

RELATED PRODUCTS



Part Number 0347502 24V 60mm Amber Front Blackout Marker Light - Bulk Qty (18 MIN)



Part Number 0347522 24V 60mm Amber Rear Blackout Stop Light - Bulk Qty (18 MIN)



Part Number 0550312 24V 60mm Cyan LH Blackout Driving Light - Bulk Qty (18 MIN)



Part Number 0550732 24V 60mm Cyan RH Blackout Driving Light - Bulk Qty (18 MIN)



Part Number 0556132 12-24V 117mm Cyan Blackout Driving Light with Tan Housing -Bulk Qty (24 MIN)



Part Number 0556142 12-24V 117mm Cyan Blackout Driving Light with Green Housing -Bulk Qty (24 MIN)

