


LED Safety Light - Model 560 Warning Projector Light

PRODUCT INFORMATION

| | |
|--------------------------------------|--|
| Description | 12-72V LED Universal Warning Red Projector Light |
| Height | 118.92 mm / 4.68 in |
| Width | 153.90 mm / 6.06 in |
| Depth | 136.65 mm / 5.38 in |
| Shape | Rectangular |
| Outer Lens Material | Acrylic |
| Outer Lens Color | Clear |
| Housing Material | Aluminum |
| Housing Color | Black |
| Bezel Color | Black |
| Mounting Hardware Description | Single Carriage Bolt |
| Mounting Type | Adjustable Mount |
| Mating Connector | Aptiv 12110293 |
| Product Weight | 1.47 lbs / 0.67 kgs |
| Shipping Weight | 1.72 lbs / 0.78 kgs |



PRODUCT DIMENSIONS

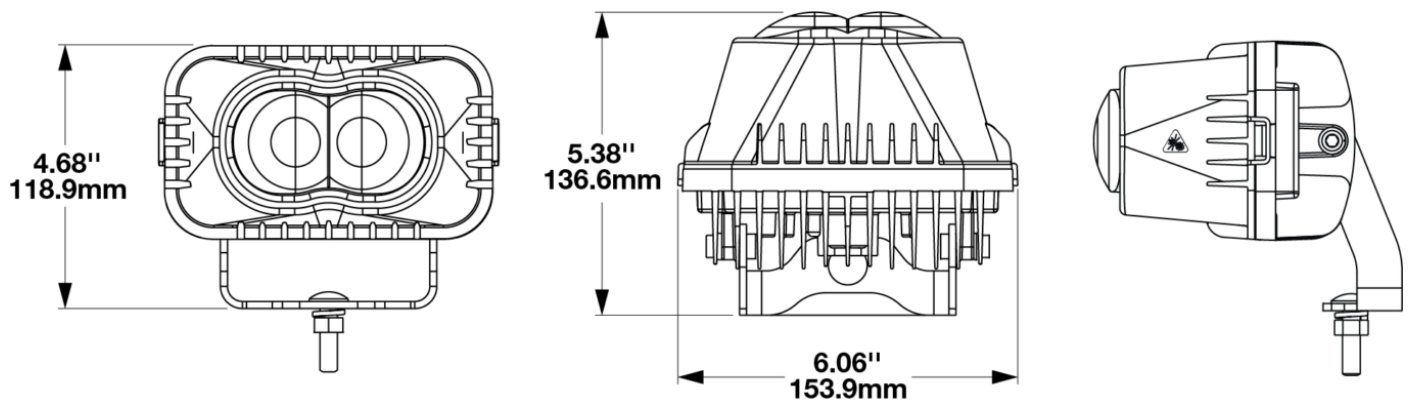

Print date: 2024-11-10

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER
Engineered. Lighting. Solutions.

LED Safety Light - Model 560 Warning Projector Light

ELECTRICAL SPECIFICATIONS

| | |
|--------------------------|------------------------|
| Input Voltage | 12-72V DC |
| Operating Voltage | 10-90V DC |
| Red Wire | + Power |
| White Wire | - Ground |
| Black Wire | Mode Selection |
| Current Draw | 3.6A @ 12V DC (Mode 0) |

REGULATORY STANDARDS COMPLIANCE



ECE Reg 10

PHOTOMETRIC SPECIFICATIONS

| | |
|------------------------|---|
| Beam Pattern(s) | Warning - Flashing Warning Warning - Keep Out Zone |
|------------------------|---|



Print date: 2024-11-10

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

LED Safety Light - Model 560 Warning Projector Light

APPLICATIONS



INSTALLATION & APPLICATION INFORMATION

Black Wire is Mode Selection:

Select desired mode by touching black wire to Power + (1-2 sec)

Mode will switch to next state per table below.

Once desired state is set black wire can be removed or capped off.

Lamp will remain in selected mode.

Mode:

Mode Selection 0

Outter LED: Steady On, Inner LED: Steady On

Mode Selection 1

Outter LED: Flash 60 per min (1Hz), Inner LED: Flash 60 per min (1Hz)

Mode Selection 2

Outter LED: Triple flash 60 per min (1Hz), Inner LED: Triple flash 60 per min (1Hz)

Mode Selection 3

Outter LED: Flash 60 per min (1Hz), Inner LED: Triple flash 60 per min (1Hz)

Mode Selection 4

Outter LED: Flash 200 per min (2Hz), Inner LED: Flash 200 per min (2Hz)

Mode Selection 5

Outter LED: Flash 60 per min (1Hz), Inner LED: Steady On

PRODUCT WARNINGS

For California residents:

⚠ WARNING: Cancer and reproductive harm - www.P65Warnings.ca.gov.

⚠ AVERTISSEMENT: Cancer et effet nocif sur la reproduction - www.P65Warnings.ca.gov.

Print date: 2024-11-10

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

J.W. SPEAKER 
Engineered. Lighting. Solutions.

LED Safety Light - Model 560 Warning Projector Light

RELATED PRODUCTS



Part Number
1300631
12-72V LED Warning
Projector Light



Part Number
1300791
12-72V LED Universal
Warning Blue Projector
Light



Part Number
1300801
12-72V LED Pedestrian
Warning Projector
Light