


# LED Safety Light - Model 560 Warning Projector Light

## PRODUCT INFORMATION

<b>Description</b>	12-72V LED Pedestrian Warning Projector Light
<b>Height</b>	118.90 mm / 4.68 in
<b>Width</b>	153.90 mm / 6.06 in
<b>Depth</b>	136.60 mm / 5.38 in
<b>Shape</b>	Rectangular
<b>Outer Lens Material</b>	Acrylic
<b>Outer Lens Color</b>	Clear
<b>Housing Material</b>	Aluminum
<b>Housing Color</b>	Black
<b>Bezel Color</b>	Black
<b>Mounting Hardware Description</b>	28.6 Single Carriage Bolt 5/16-18X1.25
<b>Mounting Type</b>	Adjustable Mount
<b>Minimum Operating Temperature</b>	-40 °C / -40 °F
<b>Maximum Operating Temperature</b>	65 °C / 149 °F
<b>Mating Connector</b>	Aptiv 12110293
<b>Product Weight</b>	1.47 lbs / 0.67 kgs
<b>Shipping Weight</b>	1.72 lbs / 0.78 kgs



## PRODUCT DIMENSIONS

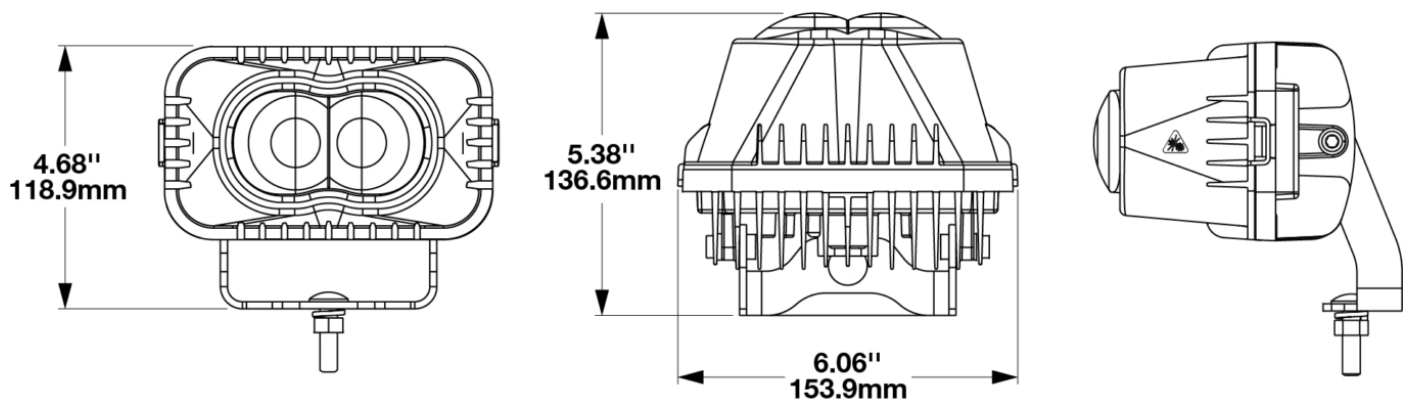

Print date: 2024-11-10

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.  
[www.jwspeaker.com](http://www.jwspeaker.com) • [speaker@jwspeaker.com](mailto:speaker@jwspeaker.com) • 262.251.6660

**J.W. SPEAKER**  
 Engineered. Lighting. Solutions.

# LED Safety Light - Model 560 Warning Projector Light


## ELECTRICAL SPECIFICATIONS

---

<b>Input Voltage</b>	12-72V DC
<b>Operating Voltage</b>	10-90V DC
<b>RED Wire</b>	+ Power
<b>WHITE Wire</b>	- Ground
<b>BLACK Wire</b>	Mode Selection
<b>Current Draw</b>	3.4A @ 12V DC (10-90)

## REGULATORY STANDARDS COMPLIANCE

---



IEC IP67

IEC IP69K

## PHOTOMETRIC SPECIFICATIONS

---

**Beam Pattern(s)**      Warning - Flashing Warning  
Warning - Keep Out Zone



---

**Print date: 2024-11-10**

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# LED Safety Light - Model 560 Warning Projector Light

## APPLICATIONS

---



## INSTALLATION & APPLICATION INFORMATION

---

Black Wire is Mode Selection:

Select desired mode by touching black wire to Power + (1-2 sec)

Mode will switch to next state per table below.

Once desired state is set black wire can be removed or capped off.

Lamp will remain in selected mode.

Mode:

Mode Selection 0

Outter LED: Steady On, Inner LED: Steady On

Mode Selection 1

Outter LED: Flash 60 per min (1Hz), Inner LED: Flash 60 per min (1Hz)

Mode Selection 2

Outter LED: Triple flash 60 per min (1Hz), Inner LED: Triple flash 60 per min (1Hz)

Mode Selection 3

Outter LED: Flash 60 per min (1Hz), Inner LED: Triple flash 60 per min (1Hz)

Mode Selection 4

Outter LED: Flash 200 per min (2Hz), Inner LED: Flash 200 per min (2Hz)

Mode Selection 5

Outter LED: Flash 60 per min (1Hz), Inner LED: Steady On

## PRODUCT WARNINGS

---

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

---

Print date: 2024-11-10

© 2024 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**   
Engineered. Lighting. Solutions.

# LED Safety Light - Model 560 Warning Projector Light

## RELATED PRODUCTS

---



**Part Number**  
**1300631**  
12-72V LED Warning  
Projector Light



**Part Number**  
**1300661**  
12-72V LED Universal  
Warning Red Projector  
Light



**Part Number**  
**1300791**  
12-72V LED Universal  
Warning Blue Projector  
Light