

# Model 8600 EVO-X Headlight

## PRODUCT INFORMATION

---

|                                      |  |
|--------------------------------------|--|
| <b>Description</b>                   | 12-24V DOT/ECE LED RHT 5-in-1 Heated Headlight with Chrome Bezel |
| <b>Height</b>                        | 143.90 mm / 5.67 in  |
| <b>Width</b>                         | 143.90 mm / 5.67 in  |
| <b>Depth</b>                         | 84.98 mm / 3.35 in   |
| <b>Shape</b>                         | Round  |
| <b>Outer Lens Material</b>           | Hardcoated Polycarbonate   |
| <b>Outer Lens Color</b>              | Clear  |
| <b>Housing Material</b>              | Polycarbonate  |
| <b>Housing Color</b>                 | Black  |
| <b>Bezel Color</b>                   | Chrome   |
| <b>Retrofits</b>                     | 1C1 & 2C1 "PAR46" or 5.75" Sealed Beams                          |
| <b>Minimum Operating Temperature</b> | -40 °C / -40 °F  |
| <b>Maximum Operating Temperature</b> | 65 °C / 149 °F   |
| <b>Connector or Wiring</b>           | Integrated 6-pin Deutsch   |
| <b>Mating Connector</b>              | Deutsch DT06-6S  |



---


**Print date: 2026-05-15**

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660


**J.W. SPEAKER**   
*Engineered. Lighting. Solutions.*

# Model 8600 EVO-X Headlight

## PRODUCT DIMENSIONS

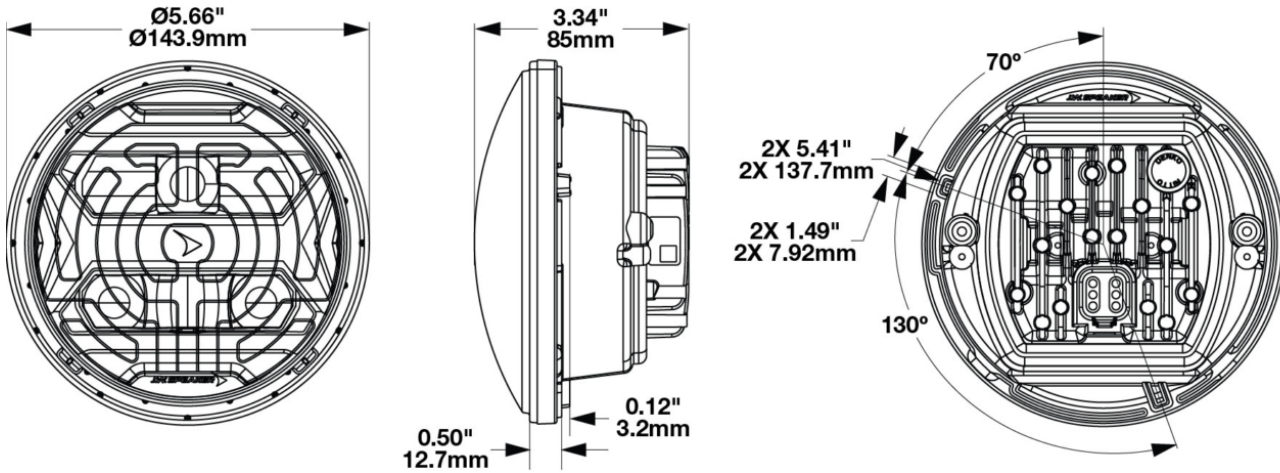

View: Back of Lamp  
6-Pin Deutsch



| PIN   | FUNCTION              |
|-------|-----------------------|
| PIN 1 | Front Position        |
| PIN 2 | Daytime Running Light |
| PIN 3 | Direction Indicator*  |
| PIN 4 | Ground                |
| PIN 5 | Low Beam              |
| PIN 6 | High Beam             |

Note: Reference number on Deutsch Connector  
\*Direction Indicator (DI) is not DOT compliant

Print date: 2026-05-15

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# Model 8600 EVO-X Headlight

## ELECTRICAL SPECIFICATIONS

|                          |  |
|--------------------------|--|
| <b>Input Voltage</b>     | 12-24V DC  |
| <b>Operating Voltage</b> | 9-32V DC   |
| <b>Current Draw</b>      | 4.96A @ 12V DC (Low Beam)<br>2.39A @ 24V DC (Low Beam)<br>7.25A @ 12V DC (High Beam)<br>3.51A @ 24V DC (High Beam)<br>0.26A @ 12V DC (Front Position)<br>0.15A @ 24V DC (Front Position)<br>5.16A @ 12V DC (DRL)<br>2.53A @ 24V DC (DRL)<br>2.98A @ 12V DC (Direction Indicator)<br>1.53A @ 24V DC (Direction Indicator) |

## REGULATORY STANDARDS COMPLIANCE



|                             |                               |
|-----------------------------|-------------------------------|
| ECE Reg 10                  | ECE Reg 148 - 1b              |
| ECE Reg 148 - A             | ECE Reg 148 - RL              |
| ECE Reg 149 - C             | ECE Reg 149 - HR              |
| FMVSS 108 s10.1 (Table XIX) | FMVSS 108 s10.1 (Table XVIII) |
| FMVSS 108 s7.10             | FMVSS 108 s7.8 (Table XIV)    |
| IEC IP67                    | IEC IP69K                     |
| SAE J1383                   | SAE J2087                     |
| SAE J222                    |                               |

**Print date: 2026-05-15**

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

**J.W. SPEAKER**  
Engineered. Lighting. Solutions.

# Model 8600 EVO-X Headlight

## PHOTOMETRIC SPECIFICATIONS

|                                      |  |
|--------------------------------------|--|
| <b>Raw Lumen Output</b>              | 3,740 (High beam), 2,330 (Low Beam)  |
| <b>Effective Lumen Output</b>        | 1,300 (High Beam), 670 (Low beam)  |
| <b>Candela Output</b>                | 57,700   |
| <b>Nominal LED Color Temperature</b> | 5700 K   |
| <b>Beam Pattern(s)</b>               | Forward Lighting - Daytime Running Light<br>Forward Lighting - High Beam (ECE)<br>Forward Lighting - Low Beam (ECE Right Hand)<br>Signalization - Front Position<br>Signalization - Turn (Front) |



Print date: 2026-05-15

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
www.jwspeaker.com • speaker@jwspeaker.com • 262.251.6660

# Model 8600 EVO-X Headlight

## APPLICATIONS



## PRODUCT WARNINGS

For California residents:

⚠ **WARNING:** Cancer and reproductive harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

⚠ **AVERTISSEMENT:** Cancer et effet nocif sur la reproduction - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

## ACCESSORIES



**Part Number**  
**3157751**

Double Ring Kit  
Mounting Assembly for  
LED Headlight Model  
8600



**Part Number**  
**3272541**

High Beam/Low Beam  
and Front Position H4  
Harness



**Part Number**  
**3272551**

High Beam and Low  
Beam H4 Harness



**Part Number**  
**3272681**

5-in-1 Flying Lead  
Harness

Print date: 2026-05-15

© 2026 J.W. Speaker Corporation • Germantown, WI U.S.A.  
[www.jwspeaker.com](http://www.jwspeaker.com) • [speaker@jwspeaker.com](mailto:speaker@jwspeaker.com) • 262.251.6660

**J.W. SPEAKER**   
Engineered. Lighting. Solutions.

# Model 8600 EVO-X Headlight

## RELATED PRODUCTS

---



**Part Number**  
**0562371**  
12-24V DOT LED RHT  
High and Low Beam  
Headlight with Black  
Bezel



**Part Number**  
**0562381**  
12-24V DOT LED RHT  
High and Low Beam  
Headlight with Chrome  
Bezel



**Part Number**  
**0562391**  
12-24V DOT LED RHT  
High and Low Beam  
Heated Headlight with  
Black Bezel




**Part Number**  
**0562401**  
12-24V DOT LED RHT  
High and Low Beam  
Heated Headlight with  
Chrome Bezel



**Part Number**  
**0562411**  
12-24V DOT/ECE LED  
RHT 5-in-1 Headlight  
with Black Bezel



**Part Number**  
**0562421**  
12-24V DOT/ECE LED  
RHT 5-in-1 Headlight  
with Chrome Bezel



**Part Number**  
**0562431**  
12-24V DOT/ECE LED  
RHT 5-in-1 Heated  
Headlight with Black  
Bezel



**Part Number**  
**0562451**  
12-24V DOT/ECE LED  
High & Symmetric Low  
Beam Headlight with  
Black Bezel