LED Headlight - Model 8700 EVO 2 Classic

PRODUCT INFORMATION

Description
Height Width Depth Shape Outer Lens Material
Outer Lens Color Housing Material Housing Color
Bezel Color Retrofits Minimum Operating
Temperature Maximum Operating Temperature Connector or Wiring
Mating Connector Product Weight Shipping Weight

12-24V DOT LED High & Low Beam Headlight with Chrome Bezel - Single Light 176.53 mm / 6.95 in 176.53 mm / 6.95 in 99.82 mm / 3.93 in Round Polycarbonate Clear Die-Cast Aluminum Gray Chrome 2D1 "PAR56" or 7" round headlight -40 °C / -40 °F

H4 H4 AMP#172615-2 2.31 lbs / 1.05 kgs 4.00 lbs / 1.81 kgs









LED Headlight - Model 8700 EVO 2 Classic

PRODUCT DIMENSIONS

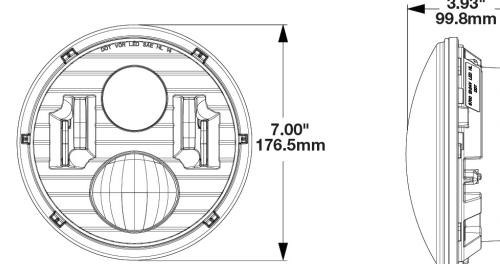




ELECTRICAL SPECIFICATIONS

Input Voltage	12-24V DC
Operating Voltage	9-32V DC
Transient Spike Protection	150V Peak @ 1 HZ-100 Pulses
Black Wire	Ground
White Wire	High Beam
Yellow Wire	Low Beam
Current Draw	3.5A @ 12V DC (High Beam) 2.00A @ 12V DC (Low Beam) 1.80A @ 24V DC (High Beam) 1.10A @ 24V DC (Low Beam)



LED Headlight - Model 8700 EVO 2 Classic

PHOTOMETRIC SPECIFICATIONS

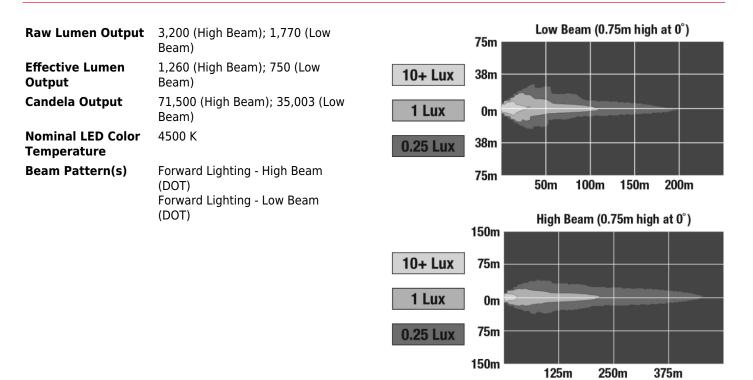

ADDITIONAL INFORMATION

Headlight must be securely mounted and properly aimed such that the beam pattern cut off line complies with all applicable regulations. If you are not familiar with the legal requirements for aiming your headlights, please see a professional service provider. We recommend that headlights are aimed with a headlight aiming system for proper alignment.

PRODUCT WARNINGS

For California residents:

- **WARNING:** Cancer and reproductive harm <u>www.P65Warnings.ca.gov</u>.
- AVERTISSEMENT: Cancer et effet nocif sur la reproduction <u>www.P65Warnings.ca.gov</u>.



